



Please follow the steps below to update the IP address information for ReIL-NET in your Leica Zeno Mobile application. For Zeno Connect skip the 1st step and select settings.


1. Slide from the left edge of the screen to open the main menu. Tap Settings.

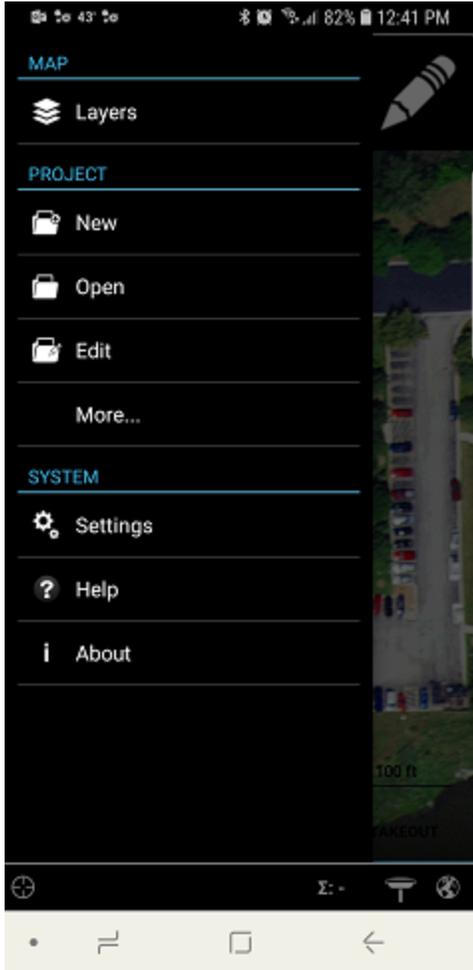


2. Here you will tap on the GPS block.

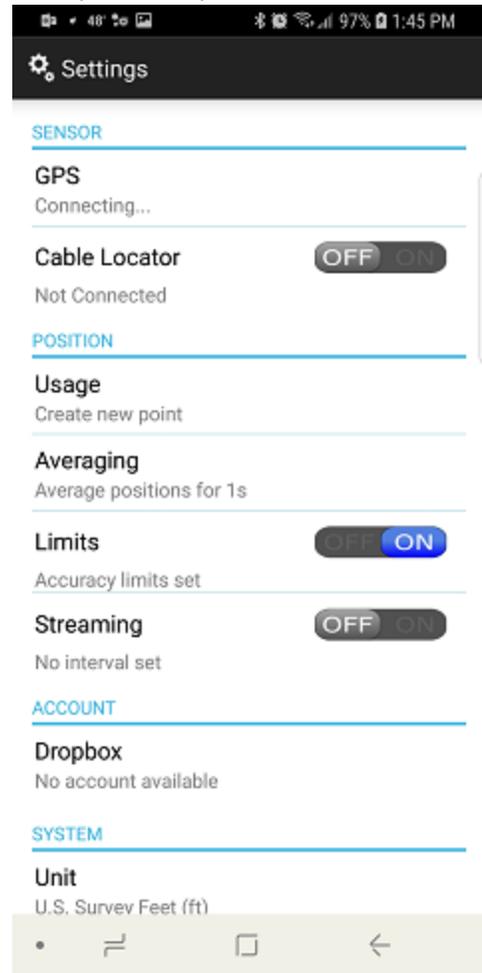


3. Next tap Realtime Corrections.

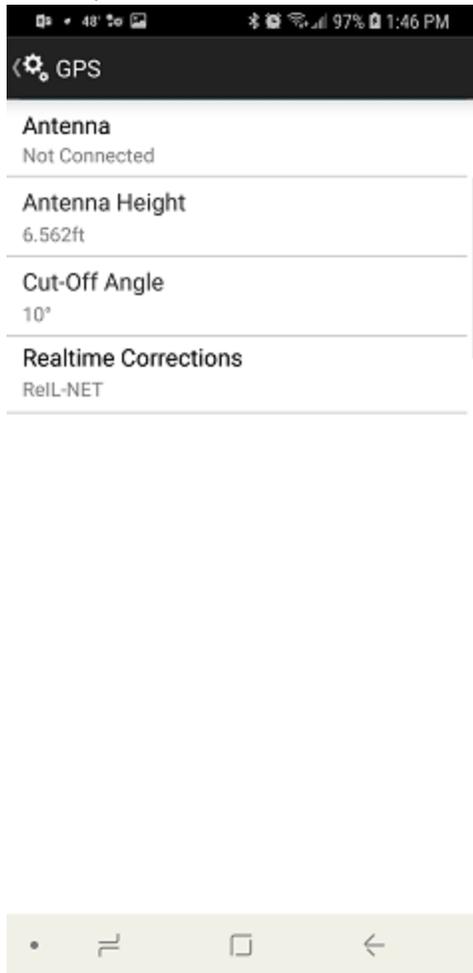


4. Tap on the 3dot edit button on the configured correction profile for ReL-NET.

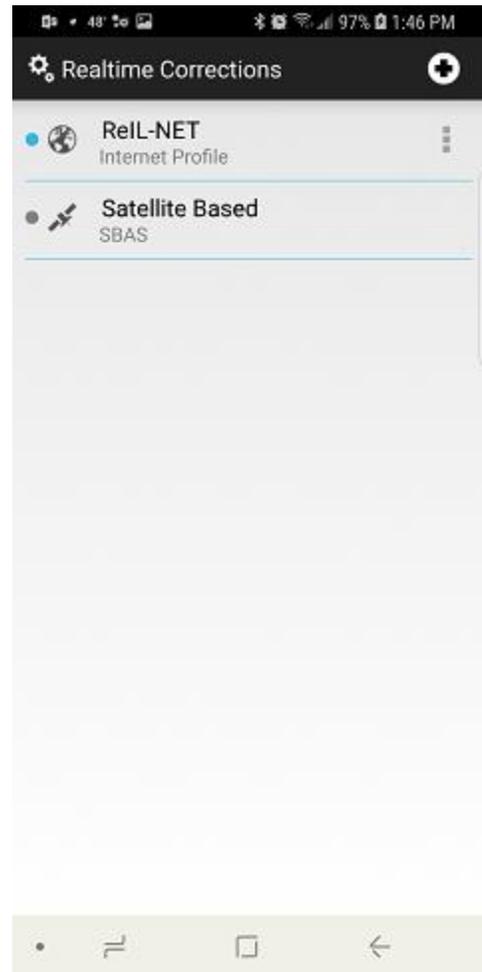

5. Tap the 3dot edit button on Data Server.

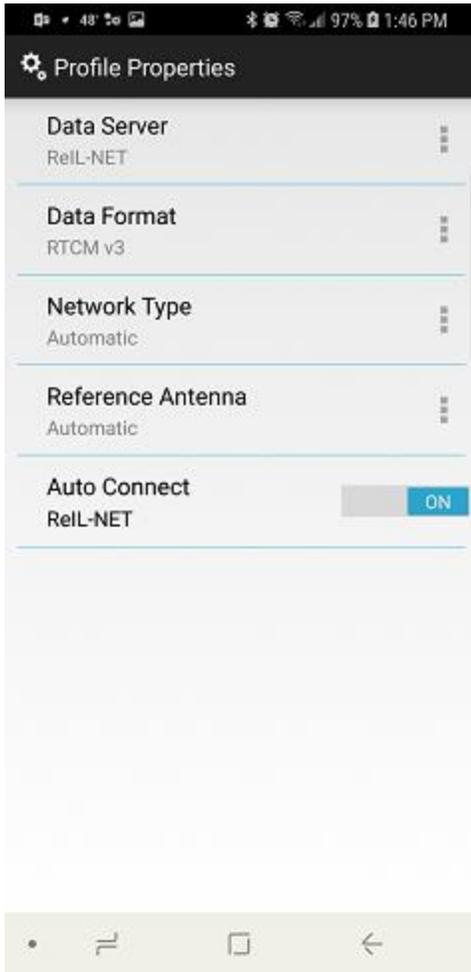

6. Tap the 3 dot edit button again on your configured Data server to edit.

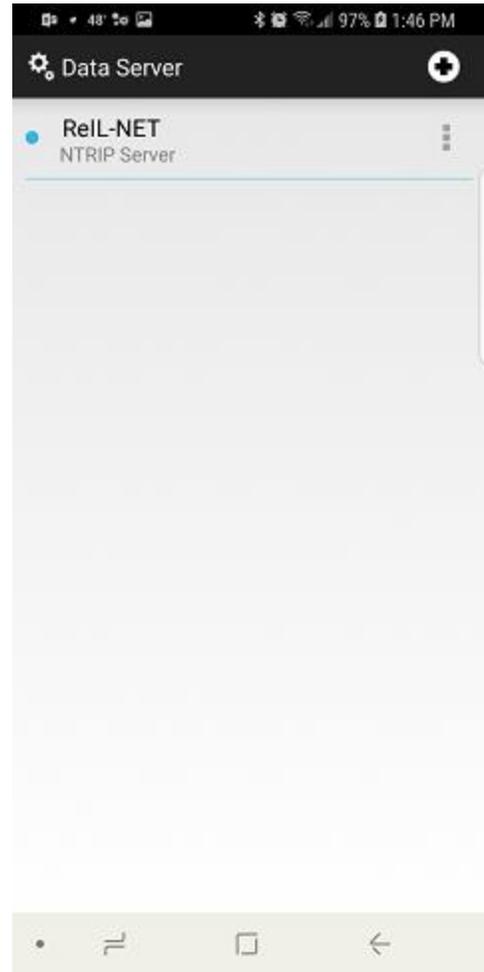

7. Lastly tap in the Address: field and replace the existing IP address with 'rtk.karaco.com'.

The screenshot shows a mobile application interface for editing server data. At the top, the status bar displays 48% battery, 97% signal strength, and the time 1:46 PM. The app title is 'Edit Data Server'. The form contains the following fields and controls:

- Name:** ReL-NET
- Address:** rtk.karaco.com
- Port:** 12050
- User ID:** JP
- Password:**
- Use NTRIP with server:** A toggle switch is currently turned ON.
- Mountpoint:** MAX

At the bottom of the form, there are two buttons: 'Cancel' and 'OK'. The bottom of the screen shows the standard Android navigation bar with icons for home, back, and recent apps.

8. Once keyed in just hit OK and navigate back to the main menu. The new IP has been stored and there is no further configuration needed.