
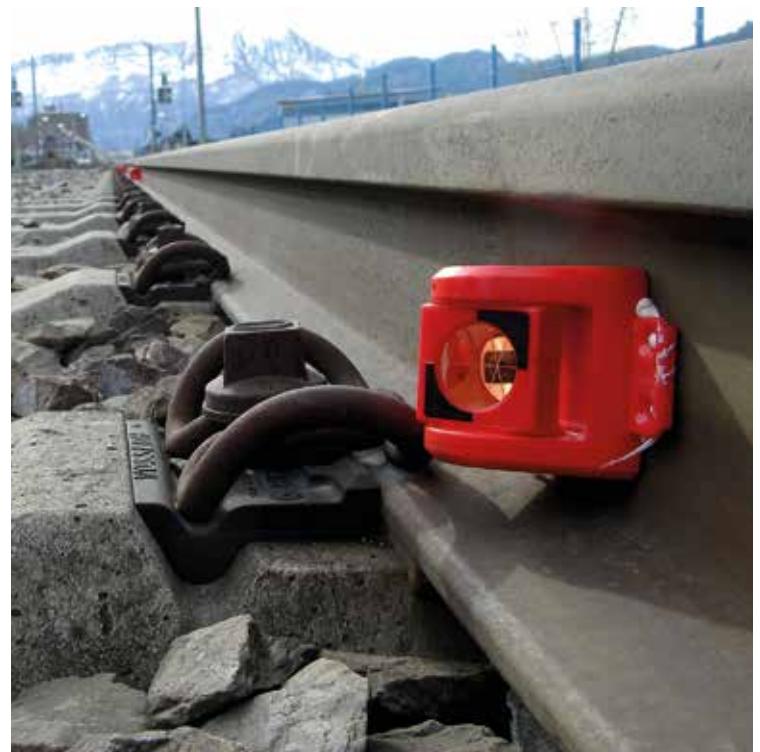


ROTHBUCHER SYSTEME

**RS 10**

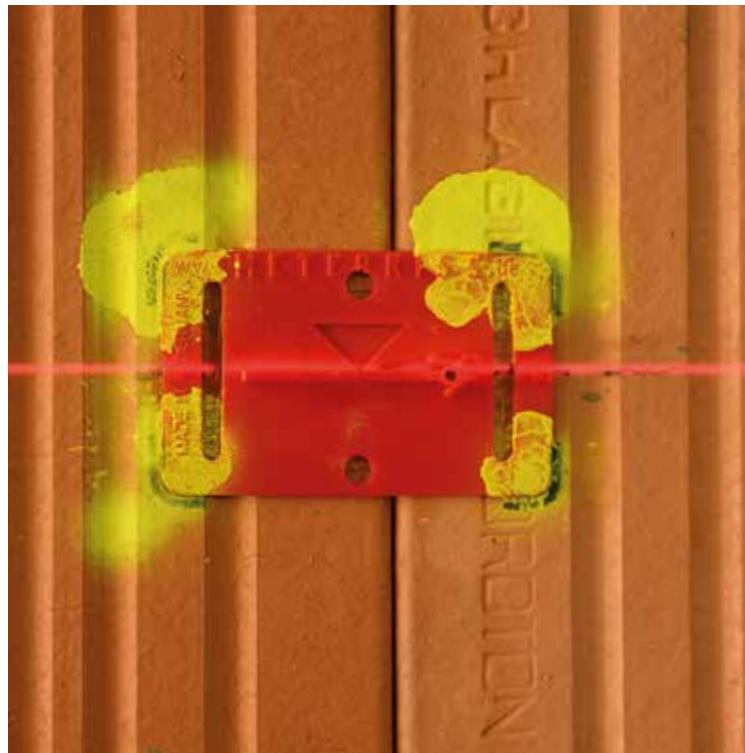

## **The RS Surveying Accessory System**

**Smart Surveying Solutions – Perfect for BIM and the Digital Construction Site**  
**Request our Price List**

## Contents – 1 of 3



Since 1996, Rothbacher Systems has been developing and selling products designed for documenting surveying points on construction sites. Over the years, our products have been successfully utilized in the fields of surveying, construction surveying, and monitoring.

High-precision instruments are indispensable to meet the high demands in surveying today. Therefore, pencil strokes, nails and other unidentifiable markers should be a thing of the past because they do not comply with the needs of modern surveying.

**Precision starts with the surveying points.** Only then can precision surveying instruments yield the expected results. This is also why our products are so much appreciated by surveyors, site managers, foremen and architects and now set a worldwide standard at many building sites.

Our system **“One reference point for all instruments”** was received with a flood of interest by the market. The system convinces with innovative solutions and easy handling. It sets new standards for reference points not only for the Digital Construction Site and BIM but also on all construction sites where modern surveying instruments are in use.

On our website [www.smart-targets.com](http://www.smart-targets.com) and on our **Rothbacher Systems YouTube channel\*** we show a wide range of solutions and examples of use.

We are pleased to show you the versatility of our surveying accessory system in our new catalogue. On the following pages, you will surely also find the right product for your current project or suitable products to supplement your surveying instrument.

If you have any questions, please do not hesitate to contact us.



Georg Rothbacher

Founder and owner of Rothbacher Systems




\*RS YouTube Kanal



**Datum and Axis Markers** RS10 to RS21

6 - 9



**Reflective Targets** RSZ2 - RSZ6, RSZ22, RSZ2YE - RSZ6YE

10 - 11



**Construction Targets** RS30 to RSAKZ6, Aluplate RSALU22

12 - 17



**Smart Angel Targets** RS80 to RS100  
RSAK80, RSAK130, RSAM80, RSAMG80

18 - 23



**Reflective Target with (swivel and) tilting function**  
RS183 to RS193M

24 - 27



**Stake Out Aids** RS95 to RS97, RS150M

28 - 31



**Mini Prisms** RSMP10, RSMP12 and RSMP15

32 - 33



**Mini Prisms with tilting function** RSMP380

34 - 35



**Reference point series with magnetic pot**  
RSMF10 to RSMF16 and RSMS-X80

36



**Prisms for monitoring tracks and steel constructions**  
RSMP380M and RSMP480M

37



**Mini Prisms with swivel and tilting function** RSMP390M

38 - 39



**220 degree Mini Prisms** RSMP480 and RSMP490M

40 - 41

## Contents – 2 of 3



### Reference Points for GPS and GNSS RS090M to RS0195M

42 - 43



### Laser Scanner Targets

RSL301, RSL496, RSL-X80, RSL-X90M  
RSL-X93M, RSL420M and RSL422M

### Laser Scanner Spheres RSLB10M and RSLB10SV


44 - 53



### Mobile Mapping-, Scanner- and Drone Targets

RSL-X94M, RSL-X95M, RSL-X96M, RSL-X97M, RSL402 (DIBOND),  
RSL602M, RSL672M, RSL632M, RSL652M, RSL430, RSL452M  
and RSL453M (SLAM)

54 - 59

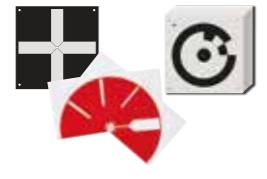

### Ground Control Targets for Drones

RSL512, RSL520, RSL532, RSL572  
RSL512XL, RSL532XL, RSL580 and RSL590M

60 - 65



### 4/4 Boundary Markers RSKM10 to RSKM40

### Fixed Point RSFP1 and Protection Cap RSFP1-A

66 - 67



### Track Machine Targets

TMT10, TMT20, TMT25 and TMT30

68 - 69



### Laser Target, foldable RSLT10

70



### Coupler Adapter

RSA-K480, RSA-K625 and RSA-K515-665

71



### Fixed Point System RSFP-X80

72



RSFP-X80, RSMS1033, RSMS1062, RSMS-X80, RSSV-X80

73

## Contents – 3 of 3



### Fixed Point System RSFP-X90 to RSFP-X99

74 - 77



RSFP-X90, RSFP-X90-1+3, RSFP-X90-2, RSFP-X90-m6+m8

79



RSFP-X90-30 to -39, RSFP-X90-5, RSFP-X99-5

80



RSFP-X90-20+21, RSFP-X99-20+21,  
RSFP-X90-25+26, RSFP-X99-25+26

81



RSSV-X90, RSSV-X99, RSFP-X97-2+3

82



RSFP-X98-1+2

83



RSFP-X99, RSFP-X99M, RSFP-X99-1

84



RSFP-X99-11+12, RSFP-X99-70, RSFP-X99-73

85



RSFP-X90-S40, RSPC90M

86



Accessories

87 - 89



Suitcase Sets KS1 to KS4


90 - 93



Ideal for concrete construction sites without plastering work and for permanent securing of axis as a negative imprint in concrete.



The negative imprints become visible on the ceiling after removing the ceiling formwork.

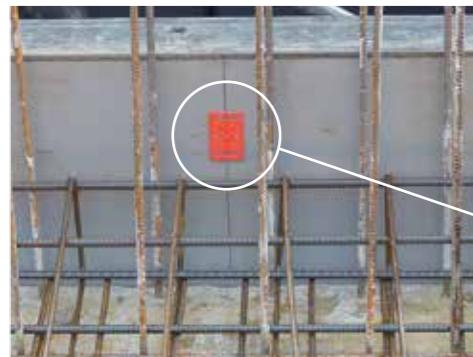

## Datum and Axis Markers RS10 and RS11\*



### RS Datum Marker – proven millions of times – for good reason

The markers RS10 and RS11\* are used to secure survey points on construction sites without plastering work and in door or window reveals.

To secure axis permanently until the building is completed, the markers are already measured and fastened in the slab formwork or the slab edge formwork on axis. The negative imprints, which are clearly visible for all trades, are used for the dry wall construction and any further inside installations.

The foreman uses the negative imprints at the ceiling edge to transfer the axis right to the freshly concreted ceiling with a string (chalk line) or laser. If required, they can later be used to install the façade.


**Datum and axis markers from Rothbacher Systeme have been the worldwide standard on many construction sites for years.**

**Datum and Axis Markers RS10/RS11\***  
80 mm x 50 mm


All dimensioning files are available for download from our website



\* self-adhesive

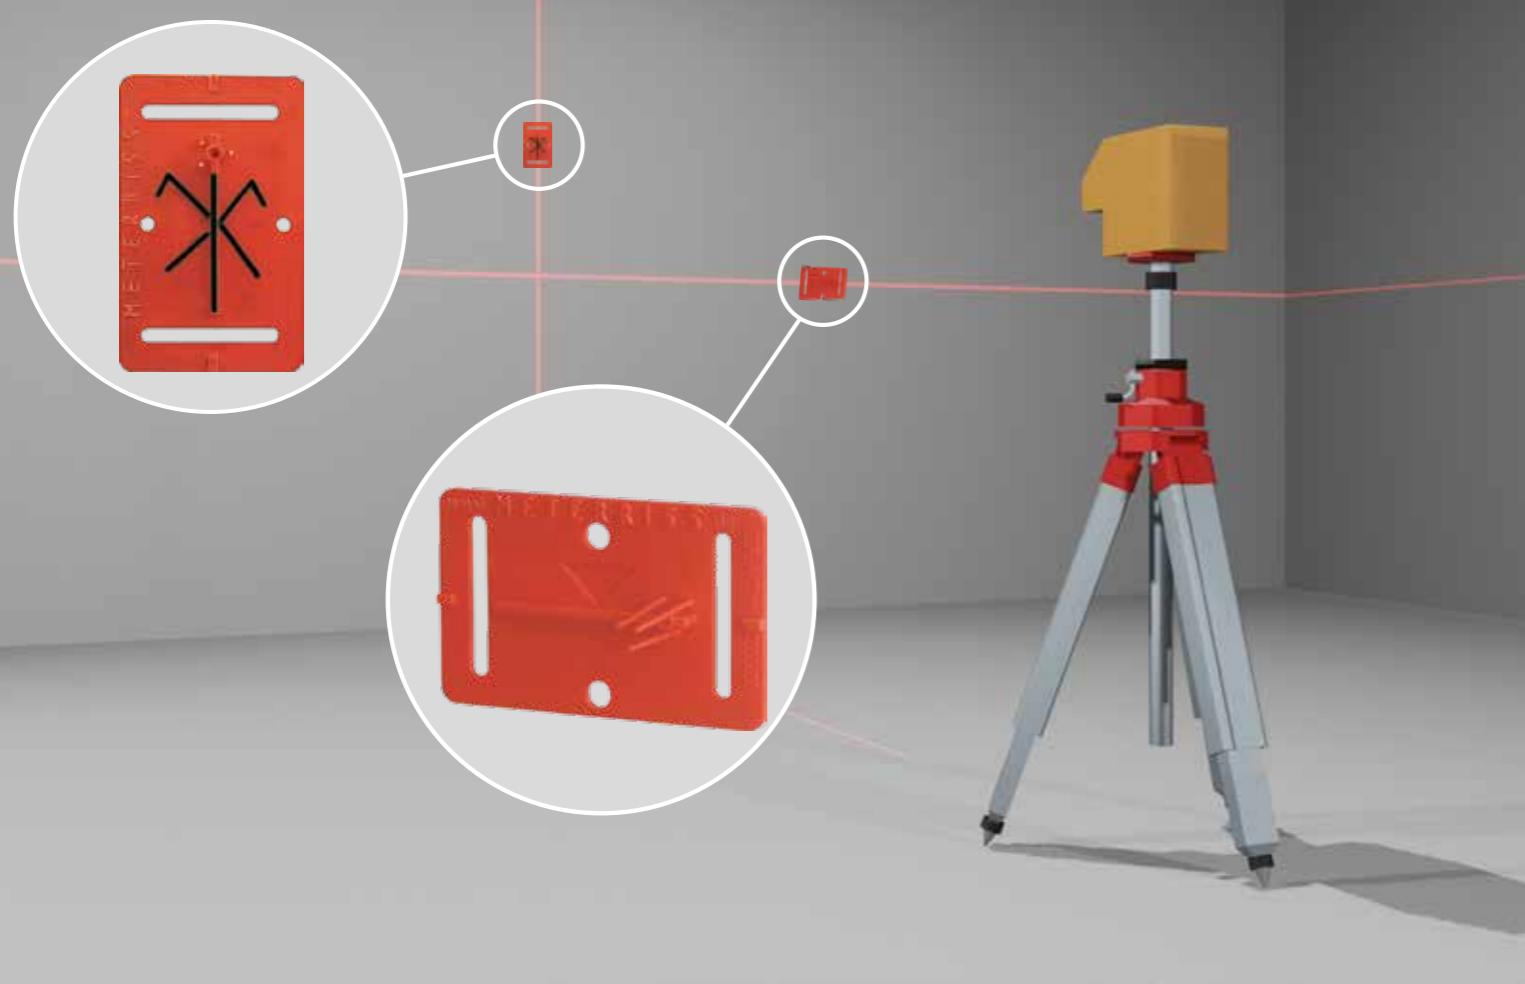

For secure marking of datum and axes on building sites with plasterwork.

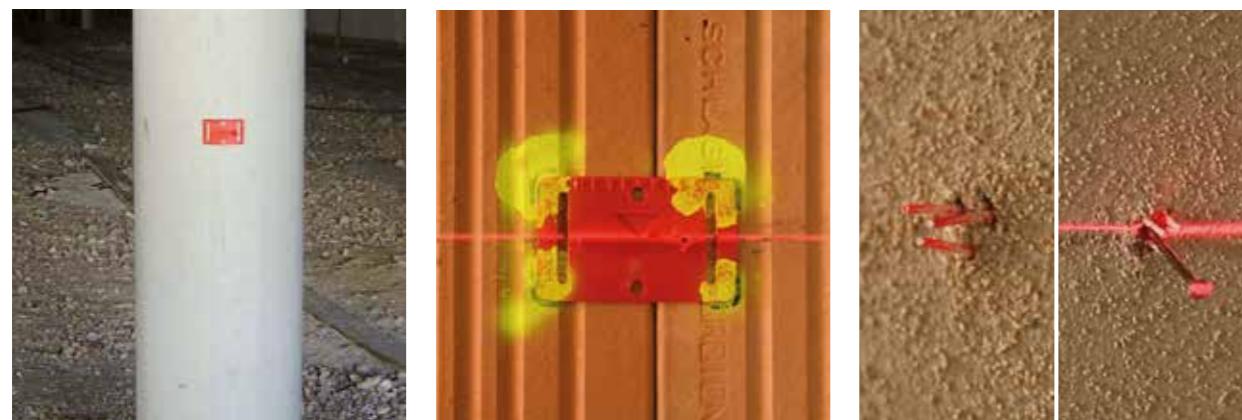

RS21r\* fixed to a column. The protrusion is cut in 4 - 5 times with a carpet knife.

RS21r\* glued, fastened, and sprayed over with colour to prevent tampering.

Elastic "stubs" to permanently ensure surveyed measurements are securely marked until after plastering work.

## Datum and Axis Markers RS20 and RS21\*



### RS Datum Marker – proven millions of times – for good reason

The markers RS20 and RS21\* are installed on unplastered or unrendered walls and serve as clear reference points for all trades. To avoid measurement differences during transfers, the markers are equipped with a protrusion to accurately align a measuring tape or rod.

The elastic "stubs" ensure that the datum point remains visible and retrievable even after plastering, securely maintaining heights and axes beyond the plastering phase. To prevent potential tampering, the corners of the markers are sprayed with color, making any intentional repositioning immediately noticeable.

After completing all work, the brushes are easily clipped off, requiring minimal finishing, while the markers remain embedded beneath the plaster as a permanent proof. For optimal installation, we recommend securing the markers with adhesive and additional fixation where needed.


We recommend gluing the markers and securing them at least once.

**Datum and Axis Markers RS20 and RS21\***  
80 mm x 50 mm

All dimensioning files are available for download from our website




\* self-adhesive

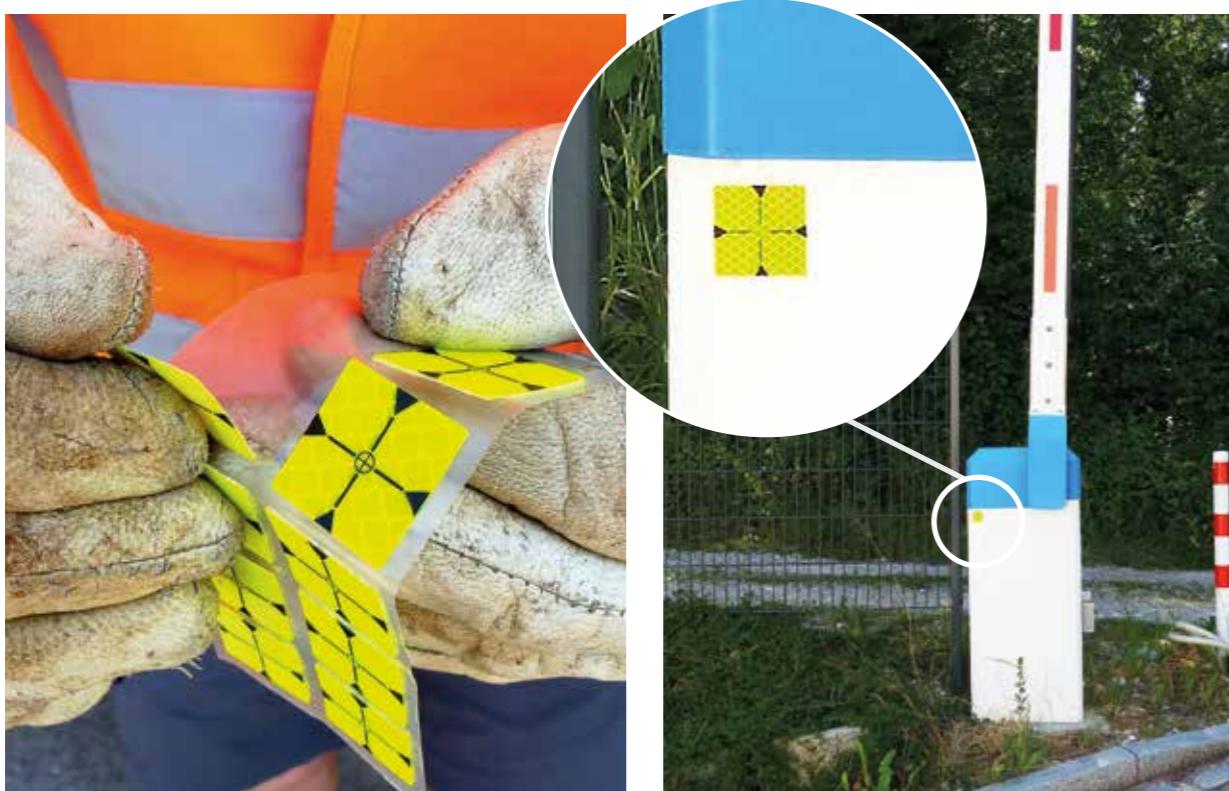

## Reflective Targets

### RSZ2 - RSZ6, RSZ22, RSZ2YE - RSZ6YE

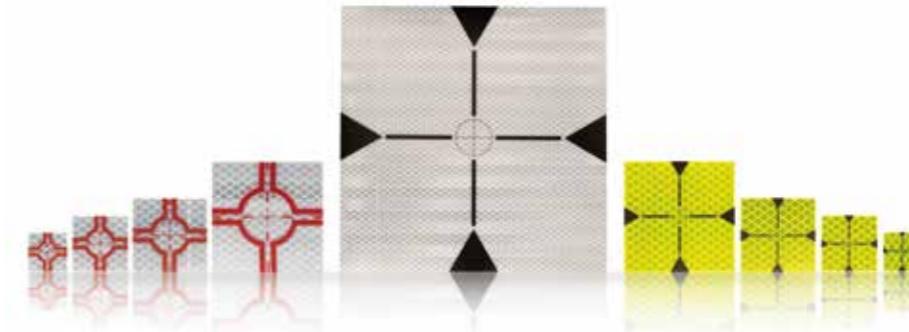

Reflective targets are available in the following sizes:

RSZ2 / RSZ2YE	21 x 21 mm	→ Range approx. 50 m
RSZ3 / RSZ3YE	30 x 30 mm	→ Range approx. 80 m
RSZ4 / RSZ4YE	40 x 40 mm	→ Range approx. 100 m
RSZ6 / RSZ6YE	60 x 60 mm	→ Range approx. 120 m
RSZ22	220 x 220 mm	→ Range approx. 500 m

The indicated ranges are average values, often exceeded by most modern measuring instruments. However, some devices require a minimum distance of 10 m.

**Our reflective targets are provided on a carrier foil, ensuring easy removal even when wearing gloves.**


To achieve an accuracy of 1 - 2 mm when measuring with reflective targets, the aiming angle should not exceed 20 degree.

For all distance measurements using total stations, we recommend exclusively using markers with reflective targets.

For distance measurements with e.g. Distos or with systems such as Flexijet we offer survey markers with crosshairs without reflective targets..



Gutters are not recommended for attaching reference points, as they are often unstable and narrow curves also have a negative effect on the accuracy of the measurement.

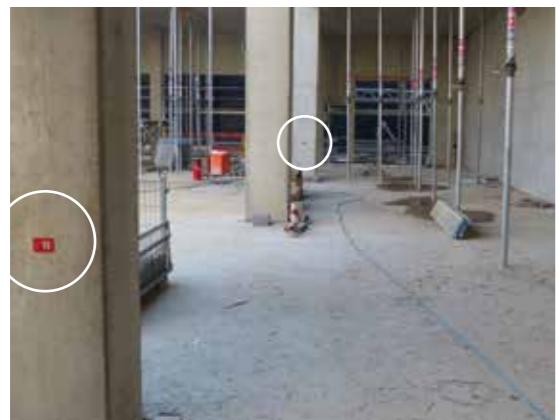

RS30r in industrial construction: documentation of heights and axes in one product.



RS30r in industrial construction: a perfect measuring point for each measuring instrument.

The height, axis and position number are indicated with number punch or water proof marker pen.



## BIM Construction Targets

### RS30 and RS31\*



### RS40 and RS41\*



#### Perfect reference points for BIM (Building Information Modeling)

→ Unmistakable fixed points for all trades

→ A fixed point for all surveying instruments currently used!

The targets RS30 and RS40 permit documentation and permanent security of heights and axes with a single product. If different measuring devices are at a construction site, the BIM targets are the best solution to avoid measuring differences.

Whether leveling instrument, laser, theodolite, or total station: The BIM Construction Targets provide the optimal reference point for each instrument and ensure identical heights, axes, and coordinates across all trades.

On difficult surfaces, the markers are permanently fastened with adhesive or with plugs and screws. A protrusion where a meter ruler or measuring rod can be placed guarantees the exact measurement of the height.

Crosshairs are imprinted on the backing plate under each reflective target to ensure the survey point is durably marked. Should the reflective target be damaged, its replacement is no problem. There is thus no loss of the original survey point and the uniqueness and durability of the survey point in accordance with BIM are guaranteed.

For distance measurements with total stations, use only targets with reflective sheets.


BIM Construction Targets RS30 & RS31\* with reflective target 30 x 30 mm  
90 mm x 60 mm

BIM Construction Targets RS40 & RS41\* with crosshair  
90 mm x 60 mm

All dimensioning files are available for download from our website



\* self-adhesive

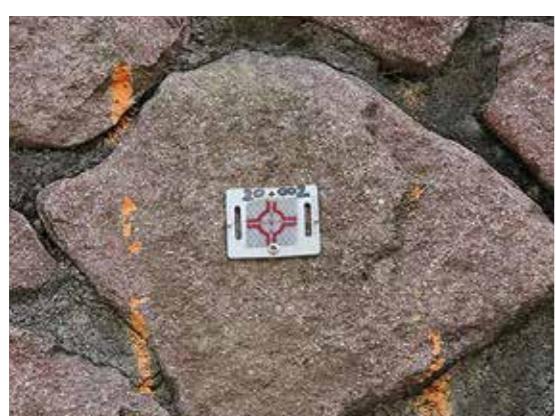

Smart targets for diverse applications

## Smart Targets

**RS50 / RS51\* RS60 / RS61\* RS70 / RS71\***



### Reference points for BIM and even more

These markers offer a wide range of applications and fully comply with all requirements for use on BIM-compliant construction sites.

In outdoor areas, they can be permanently fixed at any desired point and primarily serve as reference points for stationing with total stations or for settlement measurements. Indoors, they clearly document heights and axes. Axes can be transferred to the next floor easily and accurately using a laser or plumb line in stairwells or through an opening.

When fixed to façades, the Smart Targets can continue to be used by surveyors and foremen and are utilized by façade installers for aligning glass and stone façades. Due to their material quality and durability, the Smart Targets are also excellent for long-term monitoring of buildings, bridges, retaining walls, and more.

To ensure the survey point remains secure over an extended period, each reflective marker features a crosshair imprinted on the backing plate. If the reflective target is damaged, it can be easily replaced, allowing the original survey point to be restored quickly, easily, and cost-effectively.

For distance measurements with total stations, use only targets with reflective sheets.

Smart targets RS50/51\* with reflective target 30 x 30 mm  
75 mm x 60 mm



Smart targets RS60/61\* with reflective target 40 x 40 mm  
75 mm x 60 mm

Smart targets RS70/71\* with crosshair  
75 mm x 60 mm

All dimensioning files are available for download from our website




\* self-adhesive

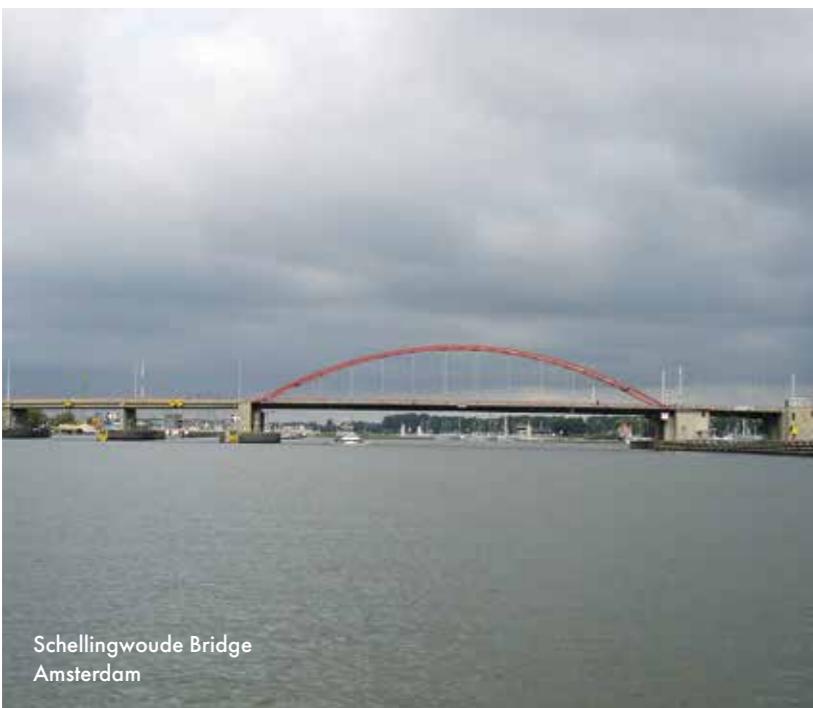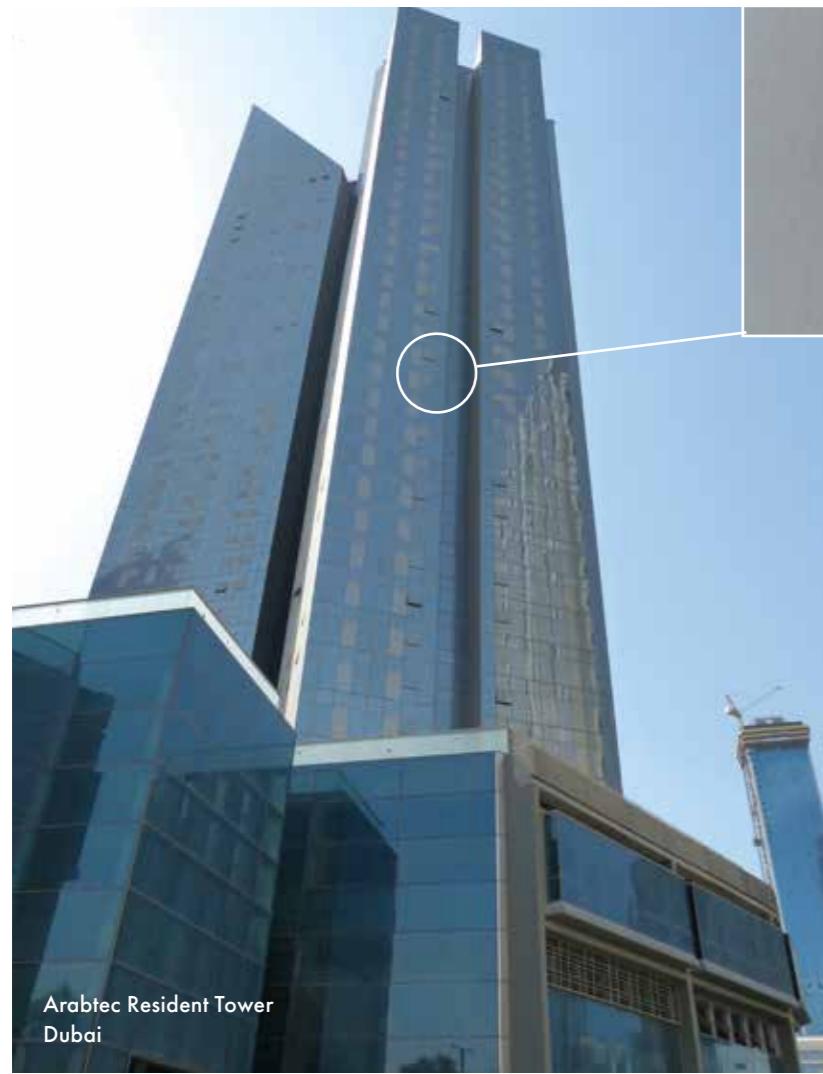

## Smart Target RSAKZ6



## Aluplate RSALU22

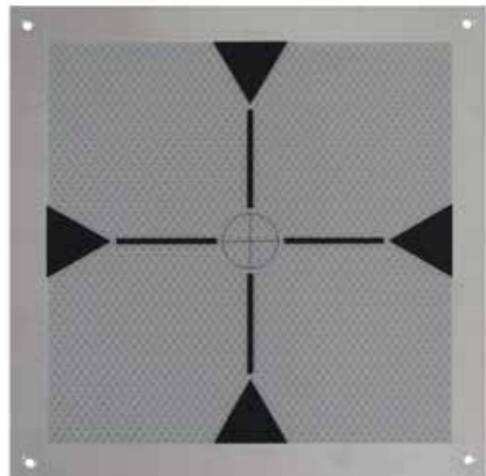

### Precision over long distances

These Smart Targets are used whenever measurements over longer distances are required.

The RSAKZ6 targets feature a 60 x 60 mm reflective target and offer a range of approximately 120 m, or up to 250 m and beyond in reflectorless mode.

The RSALU22 panels, made with a 260 x 260 mm aluminum plate and equipped with a 220 x 220 mm reflective target, are suitable for measurements up to 500 m.

Carrier plate RSAKZ6 with reflective target 60 x 60 mm  
120 mm x 75 mm

Aluplate RSALU22 with reflective target 220 x 220 mm  
260 mm x 260 mm

All dimensioning files are available for download from our website





Subway Station, World Trade Centre in New York City



RS90r, Subway Station, World Trade Centre



RS90g, Metro Rotterdam



RS80r, Al Sadd Stadium in Qatar



Al Sadd Stadium in Qatar

## Smart Angle Targets

**RS80**

**RS90**

**RS100**



### Solutions for challenging positions

These Smart Targets are used in situations where direct aiming at survey points is no longer possible due to difficult measurement positions.

The RS80 targets are mounted in a "gable-shaped" configuration and are particularly well-suited as corner solutions for observing façades and other structures.

When transferring heights and axes from outside to inside or vice versa, the RS80 targets can be installed on window reveals to facilitate measurements "around the corner."

The RS90 targets enable survey points to be aimed at from almost any position, allowing an axis to be targeted, for example, from the front, below, or above.

To ensure the survey point remains secure over time, each reflective target features a crosshair imprinted on the backing plate.

For distance measurements with total stations, use only targets with reflective sheets.

**Smart Angle Target RS80 with two reflective targets 40 x 40 mm  
90 mm x 75 mm**

**Smart Angle Target RS90 with three reflective targets 40 x 40 mm  
75 mm x 65 mm**

**Smart Angle Target RS100 with four crosshairs  
90 mm x 75 mm**

All dimensioning files are available for download from our website






Monitoring on railway tracks. Easy fixing is guaranteed with our construction glue RSMK-Fix.



Surveyors no longer need to enter danger areas.

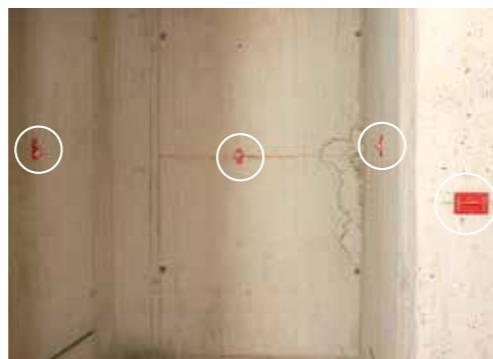

RSAK130 and RS21: perfect reference points for FFL and axes in the area of elevator shafts



Observation of sound barrier walls



Observation of bridges

## Mounting Plates with Angles and Reflective Targets RSAK80 RSAK130



### Monitoring made easy

The RSAK80 and RSAK130 products are used in applications such as railway tracks, bridges, enclosures, dams, buildings, supports, high-bay warehouses, elevator shafts, and more.

With carefully planned installation, these products allow the survey point to be targeted from almost any position. For example, along **railway tracks**, surveyors no longer need to enter hazardous areas and can perform measurements safely at any time. Similarly, dangerous and costly road closures are no longer necessary, as many measurements become significantly easier.

In **elevator shafts**, the adapters are mounted vertically on axis (see image, left). This ensures that axes are visible and accessible from any position for all trades.

To ensure the long-term security of the survey point, a crosshair is imprinted on the mounting plate beneath each reflective target.

For distance measurements with total stations, use only targets with reflective sheets.

**RSAK80** – Carrier Plate with reflective targets 40 x 40 mm  
120 mm x 75 mm

**RSAK130** – Plate with angle and two reflective targets 30 x 30 mm  
100 mm x 35 mm

All dimensioning files are available for download from our website





Survey point on the ski lift support



Coen Tunnel Amsterdam



Bridge monitoring (Tappan Zee Bridge USA)

## Targets with the Special Clip System RSAM80 RSAMG80



Stainless steel adapter

### The Clip makes the difference

To secure reference points for decades, these targets are offered with the **RS-Clip system**. Reference points that become unusable due to weather conditions or damage can be restored quickly and cost-effectively, ensuring the original reference point remains intact.

The adapters are available with or without a DW15 thread. Depending on the requirements and planned duration of use, the components can be glued, welded, or screwed into existing anchor sleeves.

For example, on bridges where anchor sleeves are installed in the cantilever arm, the targets can be directly screwed into the existing anchor sleeves and used for bridge monitoring.

For new supports and walls, anchor sleeves can be strategically planned and installed to ensure long-term monitoring after project completion. The result is **reference points with exceptional durability!**

For additional solutions designed for long-term measurements over decades, greater distances and with even higher precision, see pages 74 to 86.

Adapter RSAM80 with reflective targets 40 x 40 mm 125 mm x 125 mm

Adapter RSAMG80 with DW15 thread with reflective targets 40 x 40 mm

All dimensioning files are available for download from our website





## Reflective Target with Tilting Function RS183



### More precision from every direction

The RS183 reflective target can be precisely aligned with the instrument when using total stations and tilted up to 180 degree, enabling the same survey point to be used from various directions. Combined with the RSFP-X80 fixed point, the target can be "clicked into position" in two orientations, allowing the survey point to be aimed at from almost any direction (see image series on the left).

When installed around the construction site prior to the start of work, foremen or surveyors can use the same survey point from the foundation pit to the top floor. As construction advances, the reflective target can be easily adapted to the evolving construction process.

The integrated plug-in system allows multiple targets to be combined, enabling measurements from different directions without having to rotate the reflective targets. The distance between the survey points of the combined targets is always 60 mm.

Installation is quick and easy, even on challenging surfaces, using mounting adhesive.



The simple and quick installation on any surface makes the RS183 targets particularly user-friendly. Since the RSFP-X80 fixed point is designed for the targets to be clicked precisely into a centered position in two directions, the same survey point can be used from almost any direction.

RS183 with reflective target 30 x 30 mm  
Offset: 0  
Tilting axis height: 30 mm

All dimensioning files are available for download from our website



Accessories for these products on pages Seite 72/73 and 87 to 89

## Target and Reflective Targets

### RS192M\*

### RS193 and RS193M\*



#### Target and Reflective Target with swivel and tilting function

These targets are 360 degree rotatable and can always be precisely aligned with the instrument, allowing the same survey point to be used from any direction.

In combination with a fixed point from the RSFP-X90 to RSFP-X99 system, the RS192M\* and RS193M\* targets can be removed and later reinstalled on the exact same survey point (see pages 74 to 86).

The RS192M\* target is ideal for stationing and measurements with devices such as Leica 3D Disto, GeoMax Zoom 3D, and Flexijet 3D.

If needed, the specially designed RSPC20 protective cap reliably shields the targets from dirt and weather conditions.

A product from the series "One Point Fits All" – One reference point for all instruments

RS192M\* with non-reflective target 20 x 20 mm

RS193 and RS193M\* with reflective target marker 30 x 30 mm

Range approx. 80 m

Offset: 0


Tilting axis height: 45 mm

All dimensioning files are available for download from our website




\* magnetic

Accessories for these products on pages 74 to 86

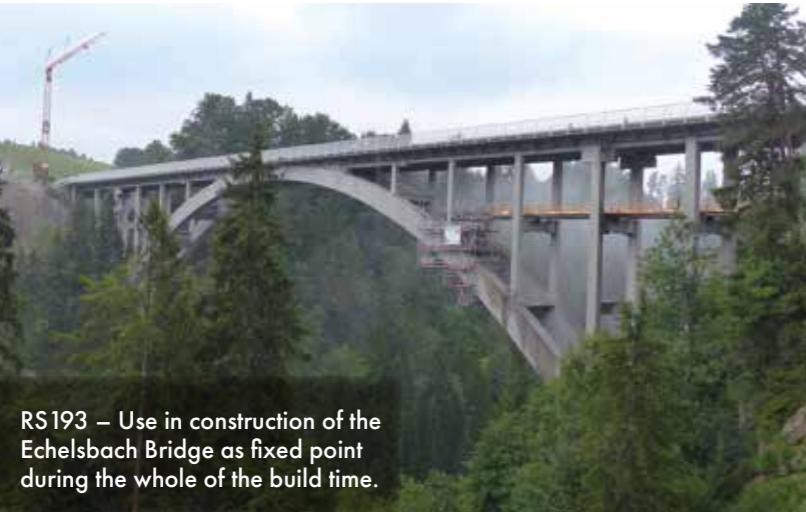


RS193 – Use in construction of the Echelsbach Bridge as fixed point during the whole of the build time.

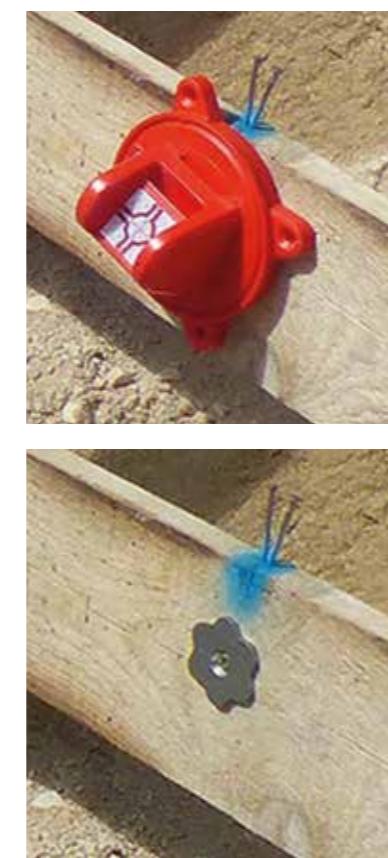


Example of the use of RS193M\* as a fixed point on different surfaces and for the exact alignment of the drill carriage.




RS95 – Stake out work on the batter board

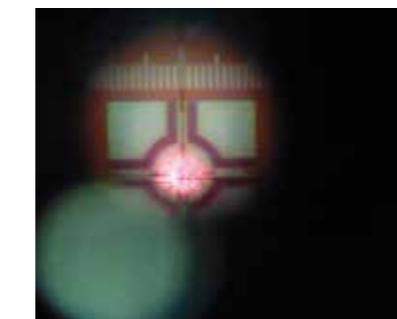

RS96 – Stake out work on the floor slab

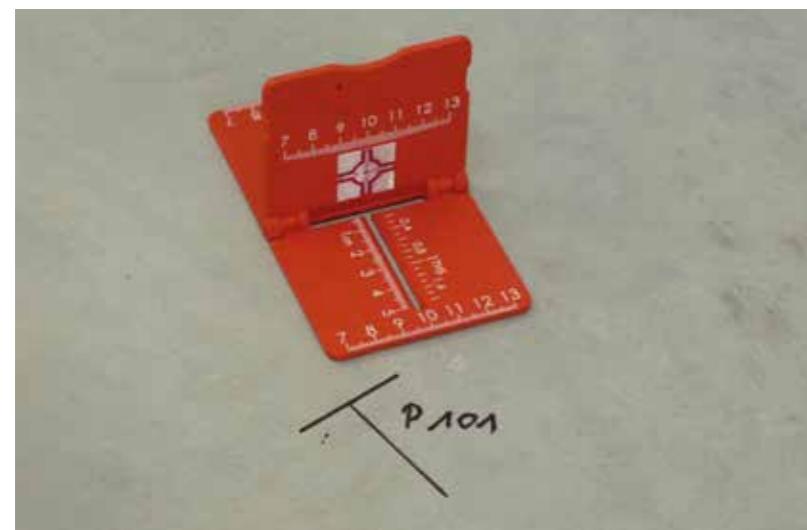

## Stake Out Aids RS95, RS96 with Reflective Target and RS97 with Non-reflective Target

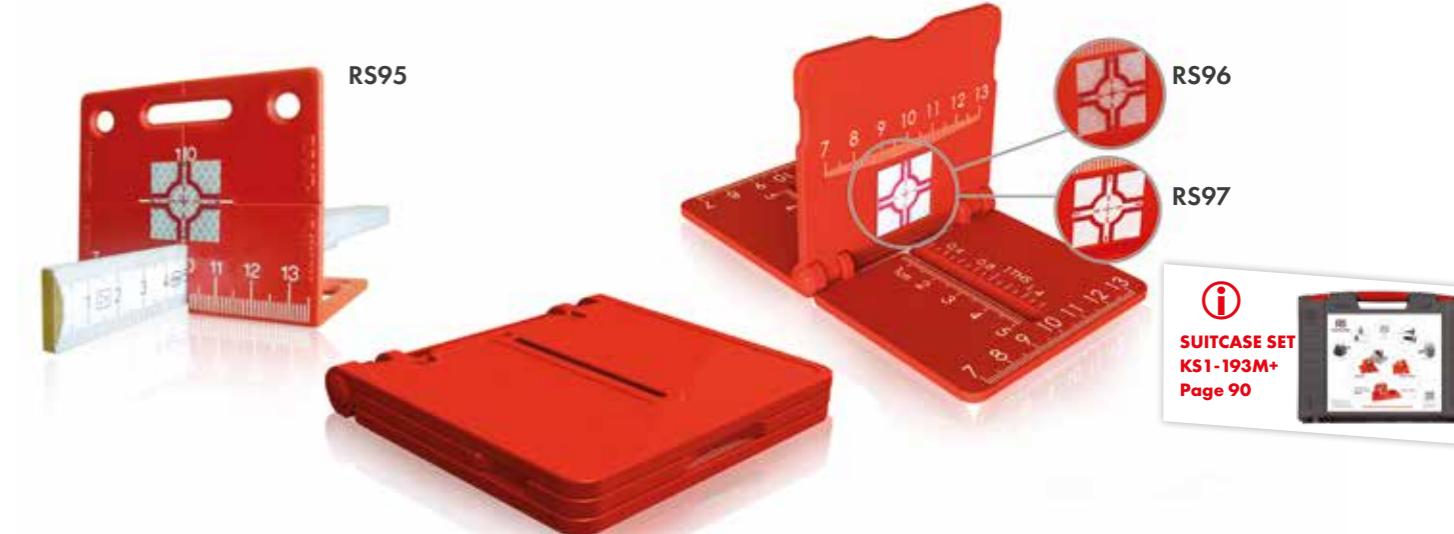

### Stake out faster and more precisely

The stake out aids RS95, RS96, and RS97 are specifically designed for precise stake out tasks at batter boards and on floor slabs. Particularly in the "final phase", during the last 5 - 10 cm, measuring survey points on concrete or floor slabs can be challenging, as the prism pole requires frequent adjustments and must be held perfectly vertical – a time-consuming process. The stake out aids significantly simplify this task: they can be placed directly on the ground and by using the measurement scales, the assistant can quickly and accurately follow and transfer the surveyor's directional instructions.

#### Advantages of the stake out aids:

- Simplifies the measurement of axes at batter boards.
- Enables quick and precise measurements on concrete and floor slabs.
- Facilitates the accurate transfer of the surveyor's directional instructions.
- Eliminates the need for precise vertical alignment of the prism pole.
- Features orientation scales for left and right (the number 10 corresponds to the axis).
- Includes orientation scales for forward and backward alignment.
- Foldable design: Fits in any shirt pocket or instrument case! (RS96/RS97)
- After minimal practice, significant time savings can be achieved.

**Stake Out Aid RS95 with reflective target 20 x 20 mm**  
Target height: 30 mm

**Stake Out Aid RS96 foldable with reflective target 20 x 20 mm + ruling lines**  
**Stake Out Aid RS97 foldable with non-reflective target 20 x 20 mm + ruling lines**  
Target height RS96 and RS97: 20 mm

All dimensioning files are available for download from our website





Staking out with the Stake Out Aid for Robotic Total Stations RS150M\*



Move the stake out aid on the base plate until the target position is reached – visible on the green circle.



Slide the prism to one side and mark the target position with a pencil.



Similarly, the target marking can be done on a vertical surface.

Fast transfer of heights with set height offset of 50 mm in the total station.

## Stake Out Aid for Robotic Total Stations RS150M\*



### The most valued stake out aid

An innovative new solution for staking out measuring points quickly and accurately on horizontal or vertical surfaces using robotic total stations.

After reaching the point to be measured, the particular measuring point is revealed directly below the prism by simply sliding the prism from position A to position B and vice versa, and can be marked directly via a cavity in the base plate.

#### Advantages:

- Precise and fast setting out
- Facilitates direct marking on the ceiling using the stake out aid upside-down
- Direct marking of the point to be measured on horizontal and vertical surfaces
- With a 50 mm height offset set in the total station, heights can be marked directly at the top and bottom edge without moving the prism.
- Prism always remains aligned to the instrument
- Paying attention to a horizontal position by means of a spirit level is not necessary, as the tilting axis height is only 50 mm.
- The RS150WB bubble level is included for straight markings on walls.
- Fast transfer of heights with set height offset of 50 mm in the total station.

On YouTube/Rothbacher Systeme we show how easily and quickly points can be staked out.

1 bubble is included in the scope of delivery. Replacement bubbles can be ordered under item no.: RS150WB



Stake Out Aid RS150M\*  
Offset: -16,9 (Leica +17,5)  
Tilting axis height: 50 mm

\* magnetic





## Mini Prisms RSMP10, RSMP12 and RSMP15



### Our smallest prisms for special cases

#### RSMP10 with 12.7 mm and RSMP12 with 17.5 mm mini prism

When using the mini prisms RSMP10 and RSMP12 for settlement measurements, the spikes can be removed and thus be inserted or glued into the smallest cracks or holes. On façades, historical buildings, supports and lots of other objects, monitoring is possible with measuring points that are barely identifiable by the general public. At concrete or masonry objects, small holes can be drilled to countersink the prisms flush with the surface.

With these mini prisms surveyors can measure in gaps, holes and corners easily and quickly. Fixed dimensions (see product drawings) give the surveyor the exact path from the point of measurement to the base of the housing or the tip of the spike. In forensics, the use of prisms include the exact surveying of bullet holes.

**PLEASE NOTE:** For precise measurements, the prism must be exactly aligned with the surveying instrument!

**RSMP10 with Ø 12.7 mm mini prism: offset -5.6 (minus 5.6) [Leica +28.8]**

**RSMP12 with Ø 17.5 mm mini prism: offset -5.4 (minus 5.4) [Leica +29.0]**

**RSMP15 with Ø 12.7 mm mini prism: offset -5.6 (minus 5.6) [Leica +28.8]**

#### Angle Plate RSMP15 with 12.7 mm mini prism

For quick mounting, RSMP15 with 12.7 mm mini prism is easily glued, even to difficult surfaces such as marble façades, historic buildings, steel work, rail tracks, gas and oil pipelines.

#### When using robotic total stations:

- Permanent settlement monitoring can be carried out during the building work
- Settlement measurements on railway tracks are possible while under the load of rail traffic
- Bridges and other structures can be monitored even more quickly and precisely

The prisms can be used at an angle of up to 25 degree.

**In the event of problems with the angle or when measuring from greater distances, we recommend our tilting mini prisms – see following pages.**

All dimensioning files are available for download from our website



RSMP15 Hearst Castle USA



RSMP15 for surveying with robotic total station while under load



RSMP10 can be placed in the smallest gaps.



RSMP12 – almost invisible to passers-by



## Mini Prisms with Tilt Function RSMP380

Proven Precision:  
 "White Paper"  
 on these products  
 available!



### Mini Prisms RSMP380 with silver or copper coated Ø 25.4 mm prism

When using these mini prisms, the measuring points can always be exactly aligned with the measuring instrument and turned through 180 degree. This enables the same survey point to be used from different directions. Bridges, façades and lots of other objects can thus be monitored more quickly and precisely. The integral plug-in system enables prisms to be combined with one another, permitting surveying from different directions without needing to rotate the prism.

Using the mounting plate RSFP-X80, you can easily fix the prisms, even on difficult surfaces, by means of our RSMK-FIX mounting adhesive. After completion of the survey, they can be removed quickly and easily and, if need be, re-affixed. The mounting plate RSFP-X80 is designed in a way so that the prisms can be clipped in – exactly centered – in two directions. The same survey point can thus be used from almost all directions. If the mounting plate RSFP-X80 is used in high-vibration environments (e.g. if mounted on railway tracks), the prisms can be secured to the mounting plate with small screws.

If necessary, fastening them with screws is also possible.

With mini prism RSMP380, ranges up to 600 m can be achieved in ATR mode. The ranges depend on the survey instrument and are influenced by weather and ambient conditions.

RSMP380 with Ø 25.4 mm mini prism:  
 Offset: -16.9 (minus 16.9) [Leica +17.5]  
 Tilting axis height RSMP380: 30 mm

All dimensioning files are available for download from our website



Easy and quick setup on any surface, avoiding unnecessary or undesirable drilling

## Reference point series with magnetic pot RSMF10\* to RSMF16\* and RSMS-X80\*



The RSMF10\* to RSMF16\* reference point series with magnetic pot offers an easy and fast way to set reference points on steel. This series enables precise and efficient placement of reference points in metal construction, marine construction, on steel structures, masts, columns, and various other applications.

### Installation step by step:

- Attach the target or prism with the pot magnet in the desired location where the reference point is planned and then remove again so that the magnet remains on the surface.
- Use a waterproof pen to mark a point through the hole in the center of the magnet or once around the magnet so that the exact position can be found again later.
- Then place the target on top and it is ready for use. The RSMP380 prisms can be aligned in all directions.



**Reference Point Series with Magnetic Pot Set RSMS-X80** – In this version, the magnet itself serves as the reference point. Prisms and targets can be rotated in any direction and easily attached or removed. After removing the prisms or targets, the magnet with the magnetic pot remains as the reference point and can be reliably protected from dirt with the protective cap RSPC-X80.

\* Both solutions enable quick and easy setup of highly precise reference points on steel, suitable for both surveying and monitoring applications.



## Prisms for track monitoring and steel construction RSMP380M\* and RSMP480M\*

Proven Precision:  
"White Paper"  
on these products  
available!



Specifically for **monitoring tracks and steel constructions**, we offer a magnetic version of our RSMP380 and RSMP480 220 degree prisms.

### Advantages:

- No need to use glue
- Uniquely quick installation – even on wet surfaces.
- No need to clean the surface.
- Option to replace the prism or magnet as needed

The prisms have been tested in all weather conditions and have consistently proven their reliability thousands of times.

**Caution: At temperatures above 80 degrees Celsius (176 degree F), the magnets may lose their adhesive force.**

If such high temperatures are possible on the surface in your area of application, we recommend adding a little glue or generally gluing the prisms.

For mounting prisms using glue (e.g. RSMK-Fix adhesive), we have developed our RSFP-X80 adapter. Even with this installation method, the prisms can be used multiple times.

With mini prism RSMP380M, ranges up to 600 m can be achieved in ATR mode, with the RM-P480M up to 300 m. The ranges depend on the survey instrument and are influenced by weather and ambient conditions.

**RSMP380M\* with Ø 25.4 mm mini prism: Offset -16.9 (minus 16.9) [Leica +17.5]**


**RSMP480M\* with 220 degree Mini Prism: Offset 0 (null) [Leica +34.4]**

Magnet (including connecting screw) and prism can be ordered separately





Monitoring of HMS Victory in the Historic Dockyard, Portsmouth

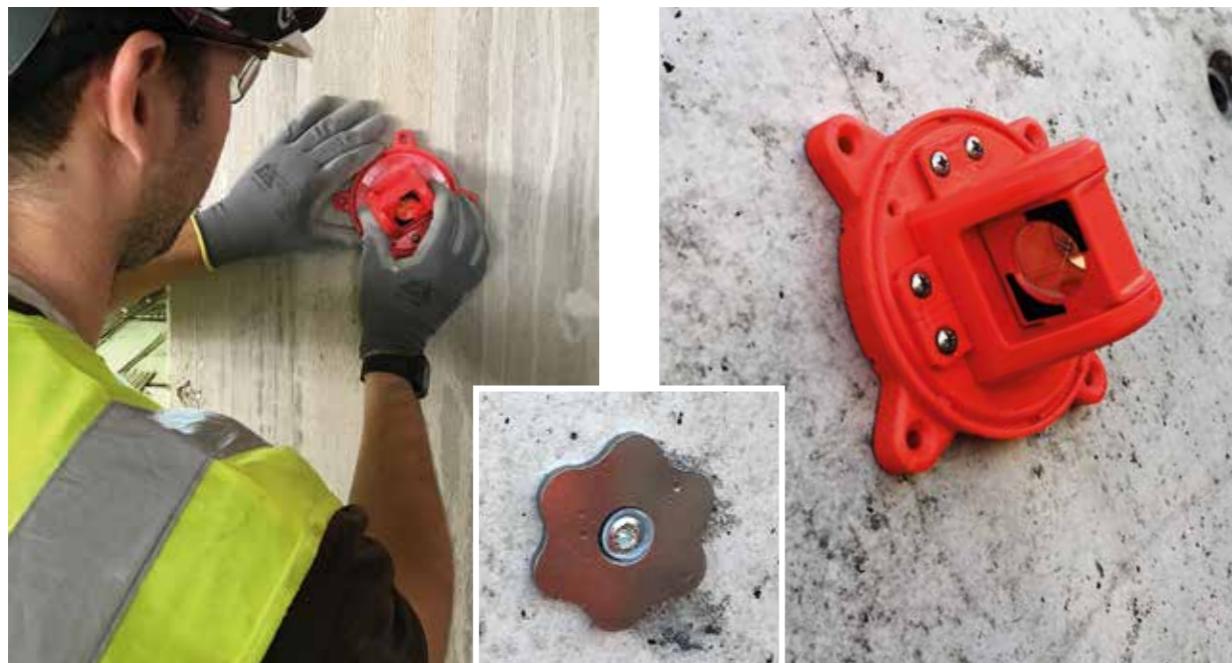

RSFP-X90 (small picture, centre) as restore point for mini prism RSMP390rM\*

## Mini Prisms with Swivel and Tilt Function RSMP390 and RSMP390M\*

Proven Precision:  
"White Paper"  
on these products  
available!



### Mini Prism RSMP390 and RSMP390M\* with silver or copper coated, Ø 25.4 mm prism

An extensive range of accessories are available for mounting prisms on different surfaces. Solutions for all kinds of mounting requirements on concrete, glass, rocks, historic buildings, oil and gas pipelines, metal and many other difficult surfaces are part of the standard repertoire – see pages 74 to 86.

#### When using total stations or robotic total stations:

- The prism can always precisely be aligned with the survey instrument.
- The prism can be rotated through 360 degree, enabling the same survey point to be used from almost any direction.
- Bridges, façades and many other objects can thus be monitored more quickly and precisely.
- Permanent settlement monitoring can be carried out during the building work.
- The OPFA system enables long-term monitoring over decades.

#### A product from the series "One Point Fits All" – One reference point for all instruments

With mini prism RSMP390(M\*), ranges up to 600 m can be achieved in ATR mode. The ranges depend on the survey instrument and are influenced by weather and ambient conditions.

When sighting survey points that are already known, ranges of up to 1000 m can be achieved with robotic total stations! For measurements in manual mode, depending on the focus, ranges of approx. 200 m can be obtained.

RSMP390(M\*) with Ø 25.4 mm mini prism:  
Offset: -16.9 (minus 16.9) [Leica +17.5]  
Tilting axis height for RSMP390(M\*): 45 mm

All dimensioning files are available for download from our website



\* magnetic



## 220 degree Mini Prisms **RSMP480 and RSMP490M\***

Proven Precision:  
"White Paper"  
on these products  
available!



### A prism that sets standards

- Enables reference points to be located from virtually any direction
- Thanks to the RS range of accessories, quick and easy mounting on almost all surfaces is guaranteed – see accessories pages 72 to 89.
- Also available as version RSMP480M\* for track monitoring (page 37)

Based on experience, aiming the prisms in ATR mode delivers the best measurement results. Accuracy levels of approximately  $\pm 1$  mm are often achieved.

The combination of easy mounting on almost all surfaces with our accessories and the possibility of being able to use the measuring point from all sides makes these prisms something special.

A unique feature in surveying is the ability to rotate the 220 degree prisms along their axis. This allows the reference point to be used horizontally, vertically, and even at an incline, which is e.g. helpful in ramp construction.

With mini prisms RSMP480 and RSMP490M, ranges up to 300 m can be achieved in ATR mode. The ranges depend on the survey instrument and are influenced by weather and ambient conditions.

**A product from the series "One Point Fits All" – One reference point for all instruments**

**RSMP480 with 220 degree Prism:**  
Offset: 0 (zero) [Leica +34.4]  
Tilting axis height: 30 mm

**RSMP490M\* with 220 degree Prism:**  
Offset: 0 (zero) [Leica +34.4]  
Tilting axis height: 45 mm


All dimensioning files are available for download from our website



Easy fixing with maximum flexibility leave nothing to be desired. One prism for many applications!



RSMP480M

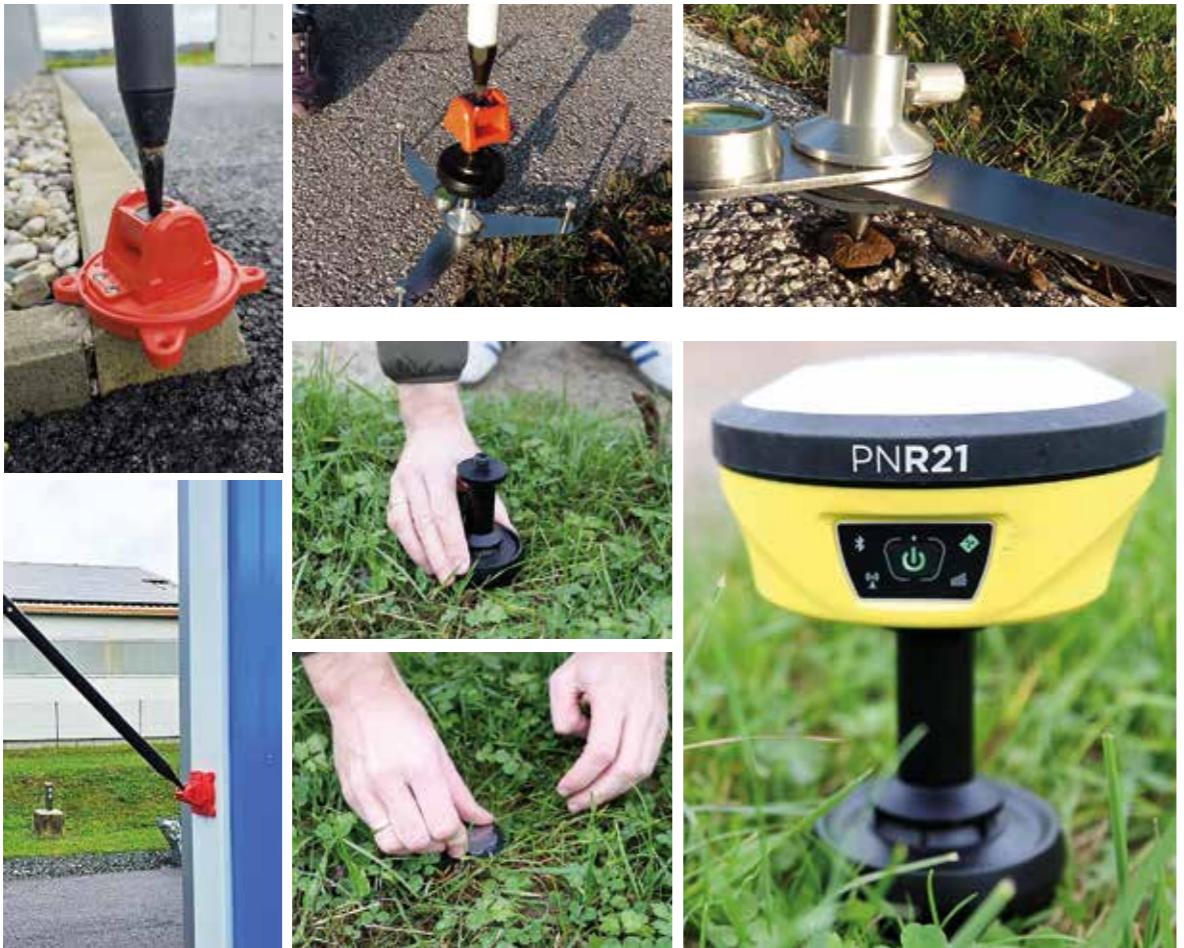

The perfect accessory for your GNSS / GPS antenna: Fixed points RS090M\* to RS0195M\*, the reference point system RSFP-X90, ground marker spike RSFP-X97-2 + -3, and floor stand RSFP-X98-2.

## Reference Points for GPS and GNSS **RS090M\*, RS0190M\*, RS095M\* and RS0195M\***



The reference points RS090M\*, RS0190M\*, RS095M\*, and RS0195M\* have been **specifically developed for use with GPS and GNSS antennas as well as antenna poles**. Combined with the OPFA system, they offer even more possibilities to optimize the use of your instruments.

**Advantages of using these reference points with GPS and GNSS:**

→ **Establishing Fixed Points:**

Fixed points with a GNSS antenna if an accuracy of less than 1 cm is sufficient. The reference points can subsequently be used with total stations, laser scanners, drones, and other instruments.

→ **No Need to Drive Nails:**

Instead, existing reference points are used, or new ones can be quickly and flexibly set with the RSFP-X90 to RSFP-X99 fixed point system. This provides significantly more mounting options compared to traditional nails:

- Gluing
- Screwing
- Magnetic attachment
- Additional options are detailed in "One Point Fits All" – OPFA.

→ **Vertical Objects:**

Fixed points can also be established on vertical surfaces (e.g., walls) using GNSS / GPS Receiver with tilt compensation

→ **Seamless Workflow:**

Supports various measurement techniques: GNSS – Laser Scanning / Lidar – Photogrammetry – Total Stations – Laser Tools (line and rotation lasers).

**A product from the series "One Point Fits All" – One reference point for all instruments**

**RS090M\* and RS0190M\*:**  
 Offset: 0 (zero)  
 Tilting axis height: 45 mm

**Extra strong  
 magnetic base**  
 page 51

**RS095M\* and RS0195M\*:**  
 Offset: 0 (zero)  
 Tilting axis height: 100 mm


All dimensioning files are available for download from our website



\* **magnetic**

**Accessories for these products on pages 74 to 86**

## Laser Scanner Target RSL301\*

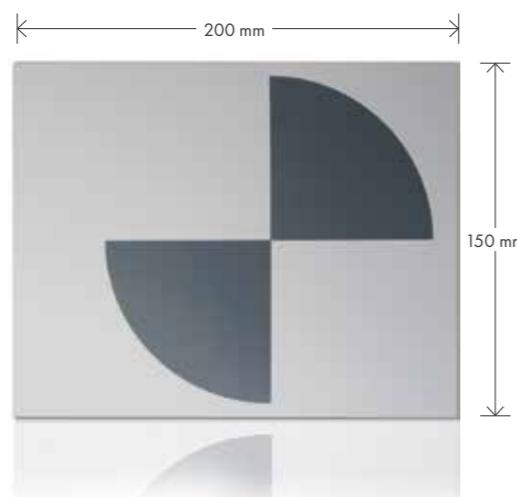


### Simple – practical – affordable

- Self-adhesive – can be reused multiple times on smooth surfaces
- Suitable for indoor and outdoor use, waterproof, UV-resistant
- Quickly and easily mounted
- Provide fixed points for linking multiple viewpoints
- For the assignment of spatial reference information to a geospatial data set

#### RSL301\*

Ideally suited for use with scanners from Leica, GeoMax, Faro and ZF.

These targets are self-adhesive and can be used multiple times on smooth surfaces. For outside, we recommend using an extra adhesive. A labelling field facilitates clear assignment of the measuring points.

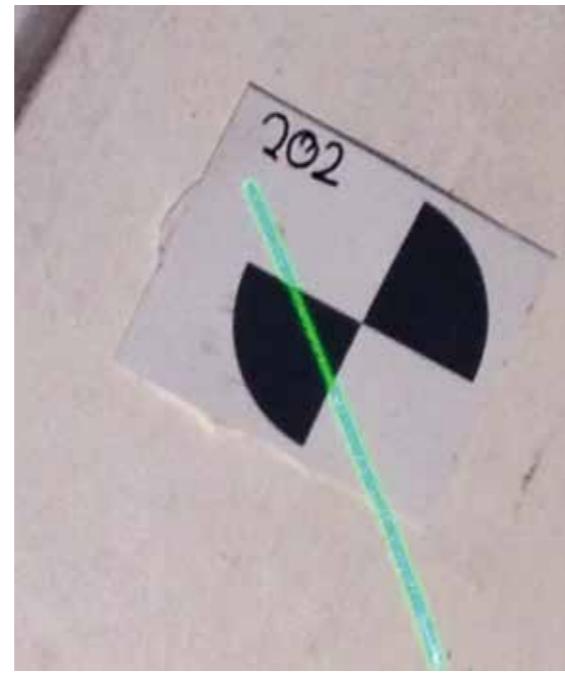

## Laser Scanner Target foldable RSL496



This target can be folded flat for storage when not in use – No need to carry bulky tripods

- One sales unit of 10 pieces with a weight of 0.9 kg and with the dimensions of 220 x 130 x 95 mm fits in any rucksack.
- Ideally suited for use with scanners from Leica, GeoMax, Faro, ZF and Trimble as well as the scan function of the Leica MS50 and for the RIEGL VZ 400 from a distance of 50 m.
- Fixed points for connecting several positions
- Assignment of spatial reference information to a geospatial data set
- Can be used from two sides since it is printed on both sides (offset +2 mm)
- Suitable for inside- and outside use

#### RSL496 offset +2 mm with dual side use



Marking through a slot in the base plate makes repeated measurements possible.



## Laser Scanner Target RSL-X80



### The matching marker for the RSMP380 mini prisms

- Ideally suited for use with scanners from Leica, GeoMax, Faro, ZF and Trimble
- Also perfectly suited for Lidar and SLAM, e.g. instruments from NavVis
- Provides fixed points for linking multiple viewpoints
- Assignment of spatial reference information to a geospatial dataset
- Higher accuracy since the fixed point can be surveyed with total station in advance (e.g. with the mini prism RSMP380) – see page 72
- If need be, all markers can also be permanently glued or fixed




For repeat surveys,  
only the reference point  
(RSFP-X80) remains on  
the object (e.g. on a  
façade).



With the adapter RSA-X80g-1, the laser scanner  
target can exactly be fitted above the measuring  
point of the RS mini prism RSMP380.  
The height offset is 60 mm.



## Laser Scanner Target RSL-X90M\*

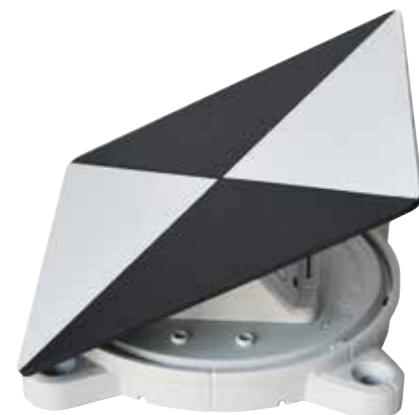


### Popular for the perfect fit with the mini prisms RSMP390M\*

- Ideally suited for use with scanners from Leica, GeoMax, Faro, ZF and Trimble
- Also perfectly suited for Lidar and SLAM, e.g. instruments from NavVis
- Provides fixed points for linking multiple viewpoints
- Assignment of spatial reference information to a geospatial data set
- Higher accuracy since in advance, the fixed point can be surveyed with total station (e.g. with the mini prism RSMP390M\*) – see pages 74 to 77
- If need be, all markers can also be permanently glued or fixed

### A product from the series "One Point Fits All" – One reference point for all instruments

For repeat measurements,  
only a small, barely visible,  
stainless steel survey mark  
(RSFP-X90) is left on the  
object as a reference point  
(e.g. on bridges or façades).

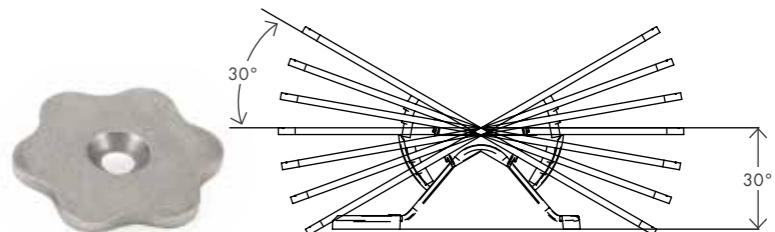

## Laser scanner and Lidar target **RSL-X93M\***



**Quality and precision define this target, and thanks to the special magnetic base, you can utilize the full range of our OPFA system.**

Some scanners or Lidar-based instruments prefer reference points that can be located directly head-on. The RSL-X93M\* target is ideal for these requirements.

### Other advantages:

- Perfect for NavVis devices, as you can stop at the exact survey point, see illustration on the left
- Also ideally suited for use with Leica, Geomax, Faro and ZF (Zoller+Fröhlich) scanners
- Greater precision as the fixed point can be surveyed tachymetrically in advance, e.g. with the RSMP395M\* mini prism
- Fixed points for connecting several positions
- Assignment of spatial reference information to a data set

### A strong magnetic base gives the products that extra capability:

- The cavity on the magnetic base for use in conjunction with the RSFP-X90 to RSFP-X99 fixed point system makes the targets universally applicable
- We show the resulting countless number of possibilities on pages 74 to 86

**A product from the series "One Point Fits All" – One reference point for all instruments**

**RSL-X93M\***  
 Tilting axis height: 100 mm

All dimensioning files are available for download from our website




\* magnetic


**Accessories for these products on pages: page 74 to 86**




The image shows the use of the targets in combination with a NavVis instrument. Reference points for sockets RSFP-X90-30 to 36 and the suction cup RSSV-X90 are particularly very popular for indoor applications. You can find a related video on our YouTube channel.

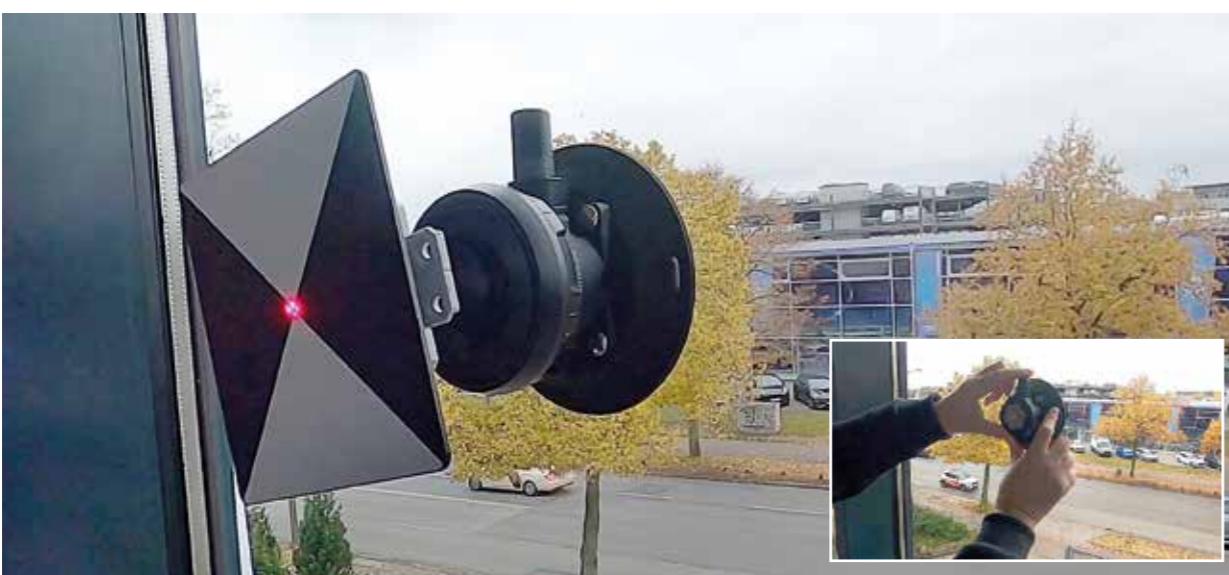

## Laser Scanner Targets with Swivel and Tilt Function RSL420M\* and RSL422M\*

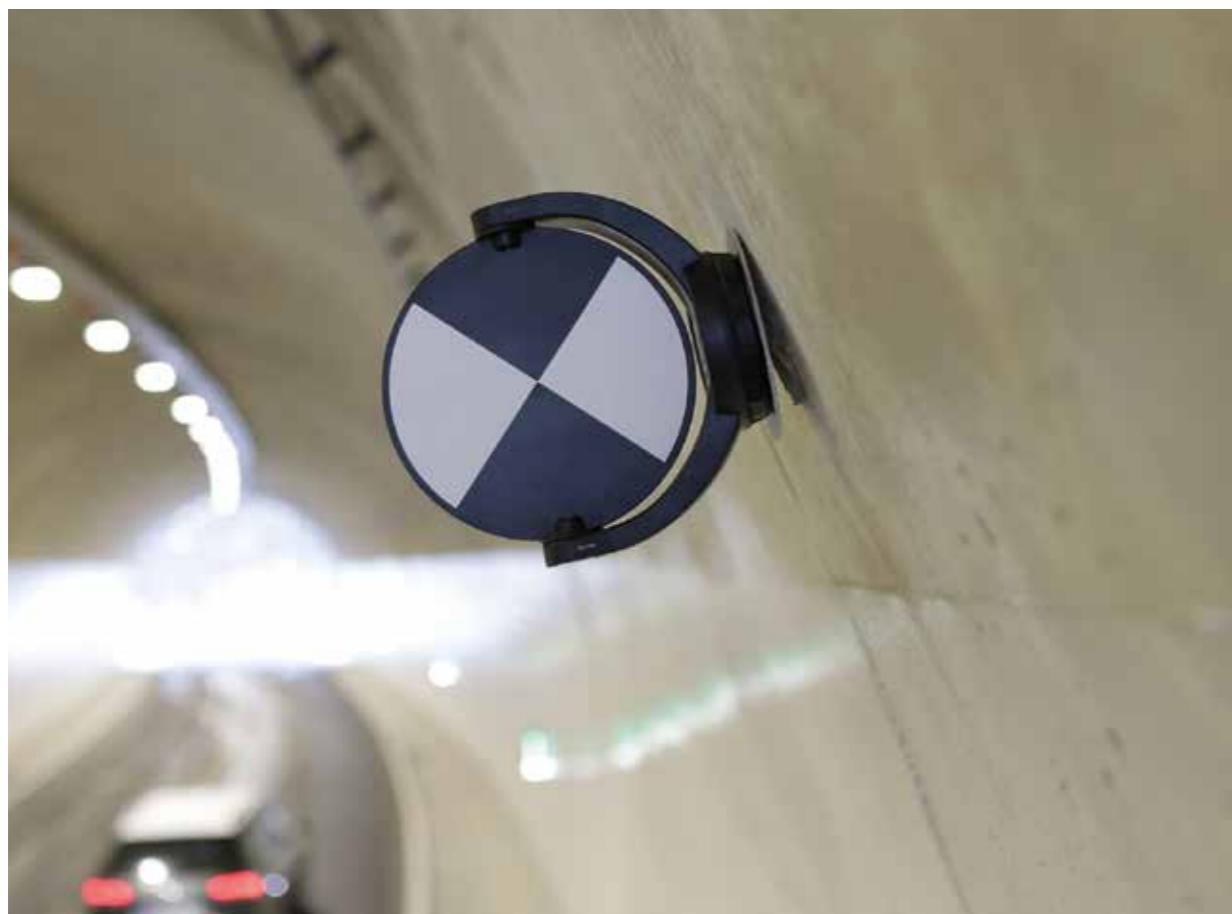

Laser scanner target RSL422M\* in a tunnel

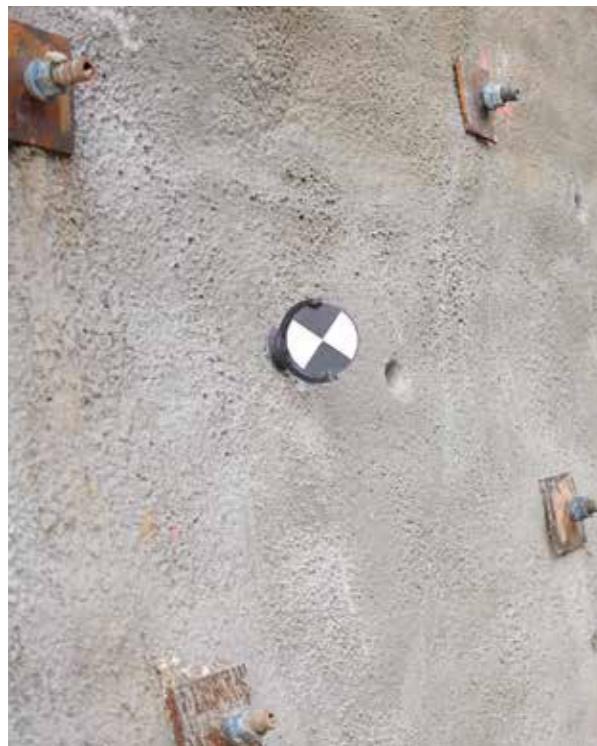

RSL422M\* on reference point RSFP-X99-12



RSL420M\* on suction cup RSSV-X90



RSL422M\* on floor stand RSFP-X98-1



**First-class workmanship, a high level of precision and a special magnetic base make these targets something special:**

- Ball bearing joints allow the laser scanner target to be aligned smoothly in any direction while always remaining precisely on axis and in position.
- The target can be used as a scanner or drone target.
- Available in two versions:
  - A) Article RSL420M\* – printed on one side with offset 0 mm
  - B) Article RSL422M\* – printed on both sides with offset +1.5 mm
- Fixed points for linking several viewpoints
- Assignment of spatial reference information to a geodata set
- Suitable for inside and outside use

**A strong magnetic base gives the products that extra capability:**

- The cavity on the magnetic base for use in conjunction with the fixed point system RSFP-X90 to RSFP-X99 makes the targets universally applicable.
- We show the resulting countless number of possibilities on pages 74 to 89.

**A product from the series "One Point Fits All" – One reference point for all instruments**

**Diameter: Ø 145 mm  
 Tilting axis height: 100 mm  
 Weight: 500 g**

**RSL420M\*/ RSL422M\* on suction cup RSSV-X90**  
 Enables the laser scanner target to be used on any smooth surface such as glass or smooth furniture fronts with no drilling or gluing!



All dimensioning files are available for download from our website



\* magnetic

**Accessories for these products on pages: page 74 to 86**

## Laser Scanner Spheres

**RSLB10M\***

**RSLB10SV**



**Laser Scanner Sphere magnetic  
 RSLB10M\* with magnetic base**

**Laser Scanner Sphere with  
 suction cup RSLB10SV**

- Scanning sphere made from shockproof plastic featuring special matt textured finish for optimum reflectivity
- Washable and dishwasher-safe surface
- Fixed points for linking several viewpoints
- Can be used from all sides
- Suitable for inside and outside use

**A strong magnetic base gives the products that extra capability:**

- The cavity on the magnetic base for use in conjunction with the fixed point system RSFP-X90 to RSFP-X99 makes the targets universally applicable.
- We show the resulting countless number of possibilities on pages 74 to 89.
  - A) Can be placed on any standard tripod or tribrach.
  - B) In combination with our floor stands RSFP-X98-1 and RSFP-X98-2: Quick, easy, and precise to handle, as well as convenient to transport.
  - C) Exact placement over an RS mini prism
- **Due to the product weight, we recommend as a reference point the RSFP-X99 series with a higher magnetic adhesion.**

**A product from the series "One Point Fits All" – One reference point for all instruments**

**RSLB10M\***

**Diameter: Ø 145 mm**

**Tilting axis height: 100 mm (RSLB10M\*)**

**Weight of scanner sphere (sphere only): 250 g**

**Sphericity: 0.3 mm at 20° C**

**Accuracy radius: ±0.15 mm at 20° C**

**Laser Scanner Sphere  
 on Suction Cup RSLB10SV**

Enables the use of the laser scanner sphere on any smooth surface such as glass or smooth furniture fronts without drilling or gluing!

All dimensioning files are available for download from our website




\* **magnetic**

**Accessories for these products on pages: page 74 to 86**

## Mobile Mapping-, Scanner- and Drone Targets

**RSL-X94M\*, RSL-X95M\*, RSL-X96M\*,  
RSL-X97M\***

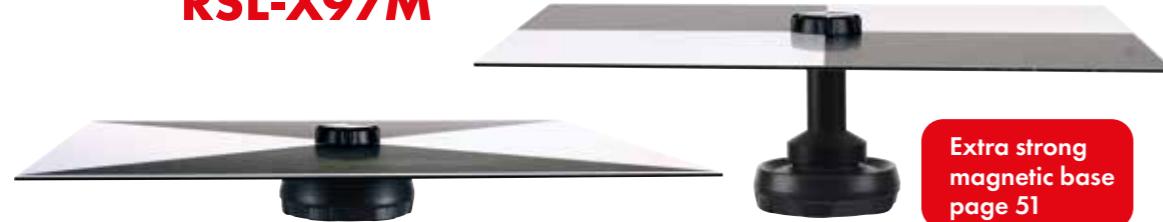

Extra strong  
magnetic base  
page 51

**RSL-X94M\* tilting axis height 45 mm   RSL-X95M\* tilting axis height 100 mm**

**RSL-X96M\* (checkerboard pattern)   RSL-X97M\* (checkerboard pattern)**

→ Targets made from high-quality DIBOND composite panels

→ For using from a greater distance or height

→ It is also possible to measure the reference points precisely in advance with total stations, whereby accuracies of  $\pm 1$  mm can be achieved.

→ In tunnels, the reference points RSFP-X90 to RSFP-X99 are first measured with the mini prism RSMP390M\* or RSMP395M\*. The reference points are then interchangeable with the targets RSL-X94M\* or RSL-X95M\*. Thus, these targets provide perfect and precise orientation for mobile mapping.

→ For even more precise measurements using ground controls, the targets can be placed on a tripod directly above the centre of a prism.

This makes these targets perfect reference points for additional surveying instruments such as scanners, drones, mobile mapping, and more.

**A product from the series "One Point Fits All" – One reference point for all instruments**



## Laser Scanner and Drone Sign RSL 401 and RSL402



**RSL401 with checkerboard pattern – printed on one side**

**RSL402 printed on both sides**

Laser scanner sign, 400 x 400 mm, for long range scanning.

The rear face, printed in black & white, can be used as a ground marker for drones.

→ Targets made from high-quality DIBOND composite panels

→ When using mobile mapping systems, the plates can even be recognized at speeds of up to 80 km/h (50 miles/h).

→ Because of their size and shape, the plates can also be used for orienteering in systems for autonomous driving.

→ Can be secured to the ground with tent pegs

→ Highly weather-resistant and durable thanks to premium DIBOND material.





Scanner target RSL602M\* on a concrete column: No drilling is required thanks to the RSFP-X99-70 strap solution.



RSL632M\* at ground target RSFP-X97-2



RSL652M\* at ground target RSFP-X97-3

## Laser scanner, Lidar and SLAM targets **RSL602M\*, RSL672M\* RSL632M\* and RSL652M\***



### with swivel and tilt function, magnetic

Thanks to ball-bearing joints, the targets can be effortlessly aligned in any direction while remaining precisely on-axis and in position.

The targets are suitable for use as scanner, Lidar, SLAM and drone targets and are available in **different versions**:

- A) Article RSL602M\* – with 200 x 200 mm target, tilting axis height 150 mm
- B) Article RSL672M\* – with 300 x 300 mm target, tilting axis height 200 mm
- C) Article RSL632M\* – with 200 x 200 mm target, tilting axis height 150 mm
- D) Article RSL652M\* – with Ø 300 mm target, tilting axis height 200 mm
- E) Artikel RSL682M\* – with 400 x 400 mm target, tilting axis height 250 mm

#### Features and applications:

- Can be placed on any standard tripod or tribrach.
- In combination with our floor stands RSFP-X98-2 and RSFP-X98-3: Quick, easy, and precise to handle, as well as convenient to transport.
- Provides the option for precise placement over RS Mini Prisms RSMP380.
- Fixed points for connecting several positions
- Precise assignment of spatial reference information to a geodata set, even over larger distances.

For mounting on tripods or tribrachs we offer the adapters RSFP-X90-1 and RSFP-X99-1.

We recommend the RSFP-X99 fixed point with enhanced magnetic force for mounting on walls or non-metallic surfaces due to the dead weight.

A product from the series "One Point Fits All" – One reference point for all instruments

\* magnetic






SLAM Target RSL430 on floor stand RSFP-X98-1



SLAM Target RSL452M\* on suction cup RSSV-X90.  
 Can also be used for RIEGL scanners.

## Laser Scanner and SLAM Targets **RSL430, RSL452M\* and RSL453M\***

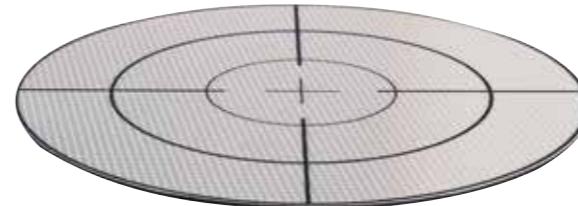

**RSL430**

- Automatically recognized through shape and reflection when using compatible software.
- Frequently used as a ground target.



**RSL452M\* and RSL453M\***  
**rotatable and tiltable  
 with magnetic base**

- Ball-bearing joints allow the target to be easily aligned in any direction while always remaining precisely centred and in position.
- The target can be used as a scanner and drone target.
- The RSL453M\* target has two differently-sized reflective targets, the centres of which are exactly opposite one another. One side is 50 mm in diameter and the opposite side is 145 mm in diameter. This means, for example, with a RIEGL scanner you can tilt the target and use the same reference point for different distances.
- Fixed points for connecting several positions
- Assignment of spatial reference information to a geodata set
- Suitable for indoor and outdoor use




\* magnetic

### A strong magnetic base gives the products that extra capability:

- The cavity on the magnetic base for use in conjunction with the fixed point system RSFP-X90 to RSFP-X99 makes the targets universally applicable.
- We show the resulting countless number of possibilities on pages 74 to 89.
- One example of the many possibilities: When used inside, our socket adapters and suction cups allow you to create permanent reference points without leaving any marks!



A product from the series "One Point Fits All" – One reference point for all instruments



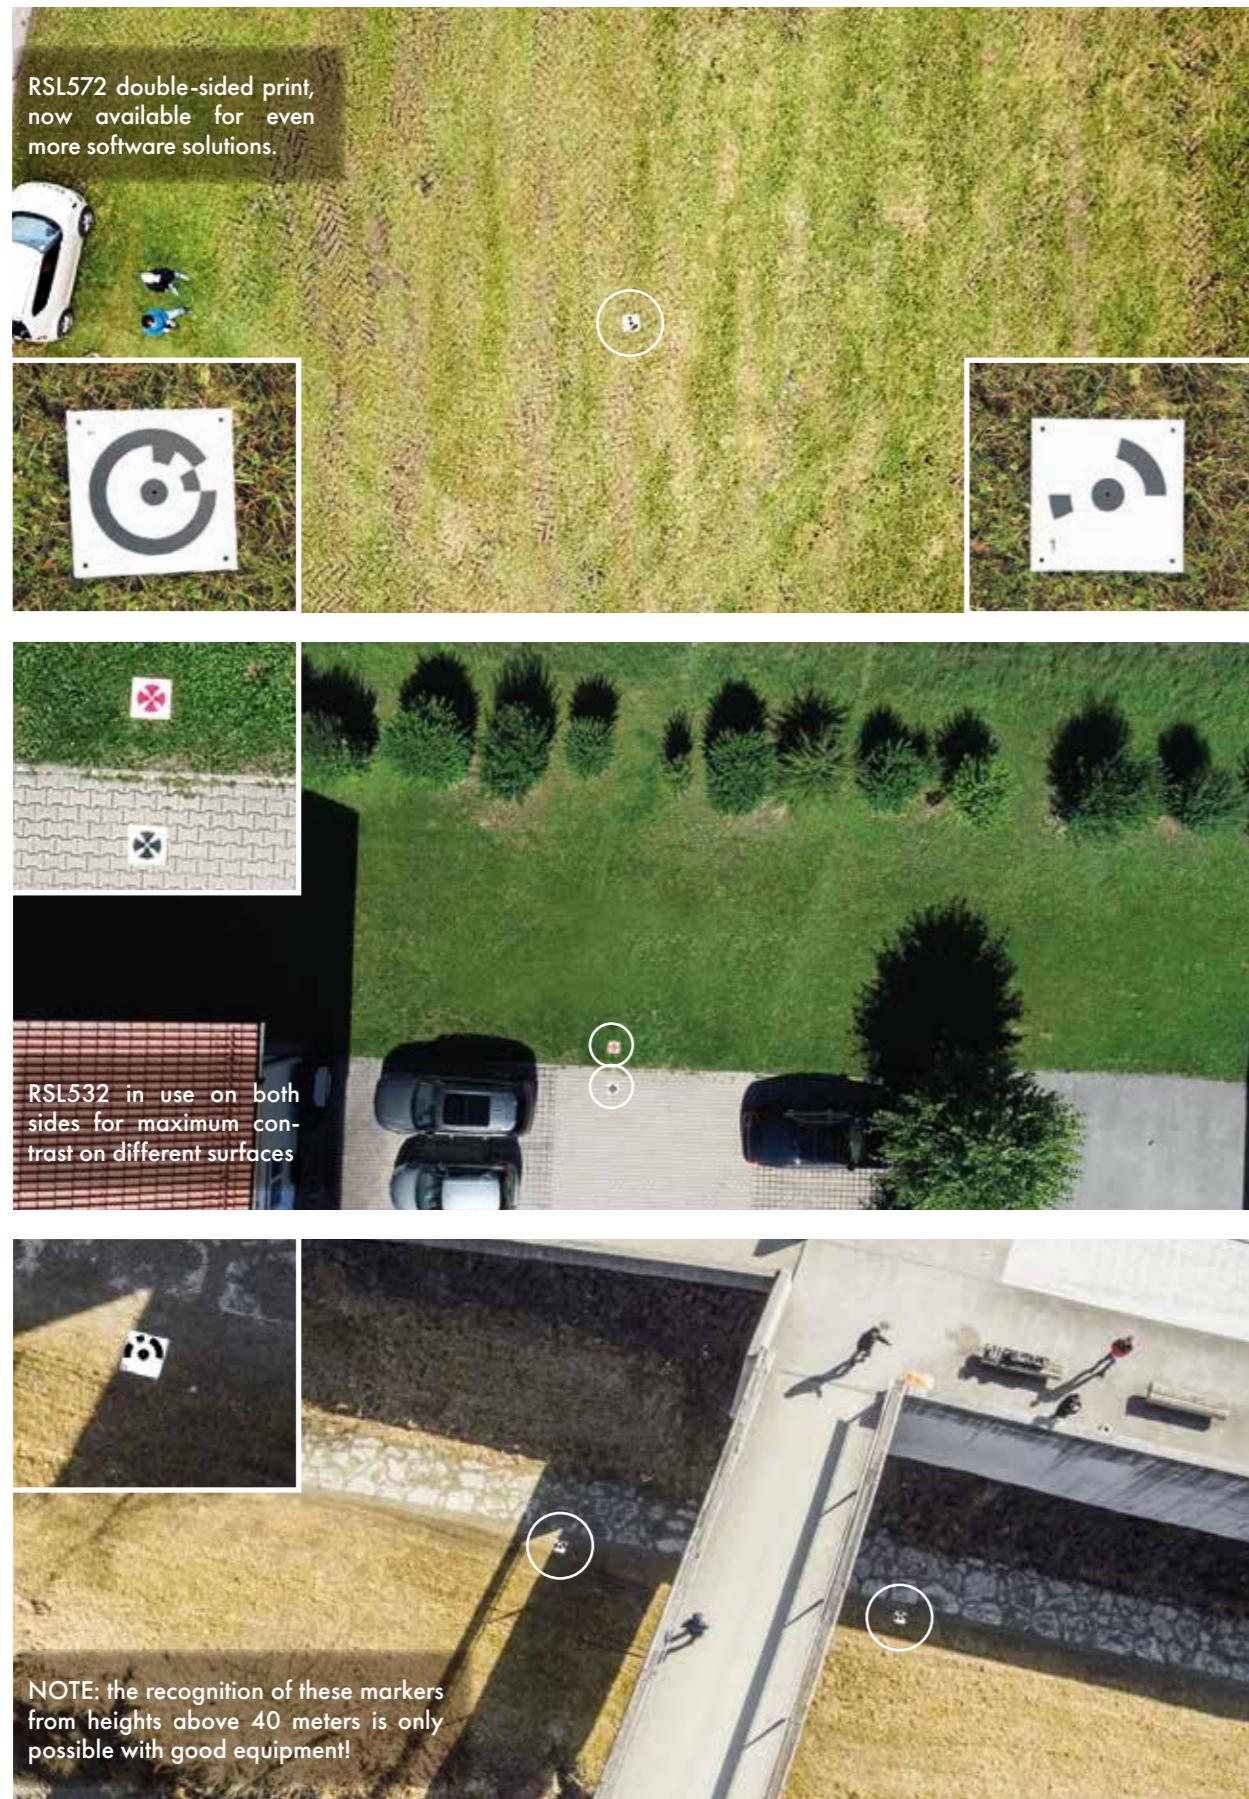




## Ground Control Targets for Drones

### - with cross RSL512

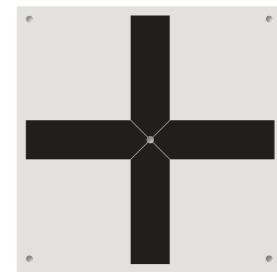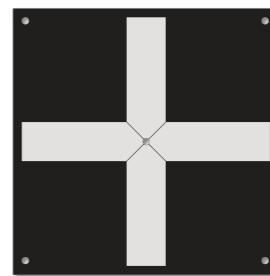


RSL512 printed on both sides  
for maximum contrast on different surfaces

### - with circle RSL520 and RSL532

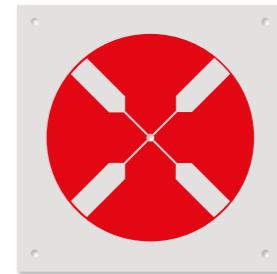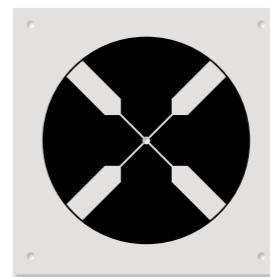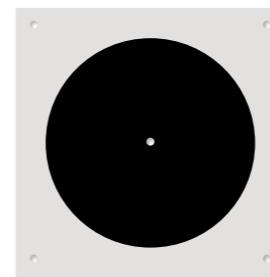

RSL532 printed on both sides for maximum contrast on different surfaces.  
Ideal for use up to a height of approx. 100 meters, for heights above 100 meters, we recommend the hinged ground markers (see next page)

### - with numbering RSL572-10, RSL572-20 and RSL572-30

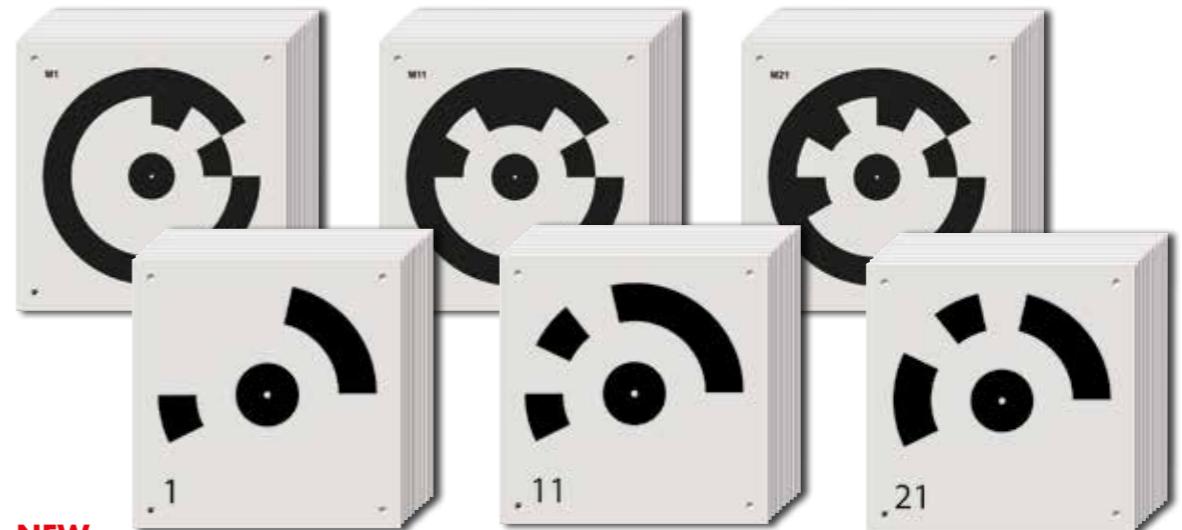

#### NEW

printed on both sides: Numbering 1 - 10

- Size 350 x 350 mm
- Waterproof and UV resistant
- A central hole permits exact calibration by GPS
- Can be secured to the ground with tent pegs
- Can be used lots of times

Numbering 11 - 20

Numbering 21 - 30

- Marker visibility is device and weather-dependent
- Automatic number recognition with appropriate software such as: Agisoft (RSL572-10, RSL572-20, RSL572-30)





Drone target RSL512XL




Drone target RSL532XL

## Ground Control Targets for Drones, unfoldable

### - RSL512XL, unfoldable with cross



### - RSL532XL, unfoldable with circle

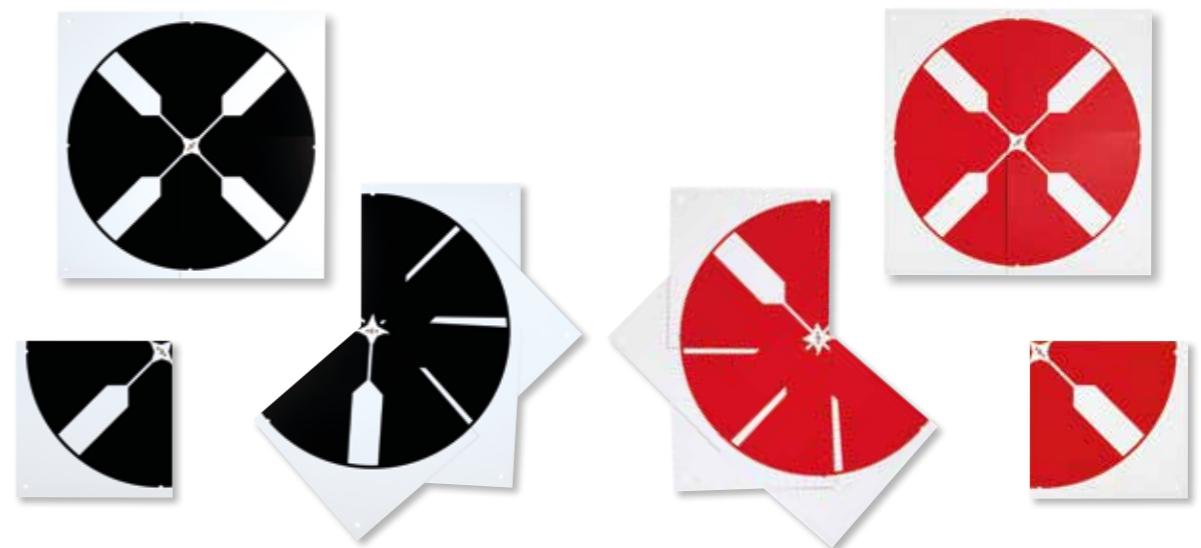

- Size 350 x 350 mm closed,  
650 x 650 mm opened
- Waterproofed and UV resistant
- Fixed points for use with drones
- A central hole permits exact calibration  
by GPS
- Can be secured to the ground with tent pegs

- Can be used lots of times
- Ideal for heights above 100 meters
- **Marker visibility is device and weather-dependent**
- Printed on both sides, depending on the back-  
ground, the lighter or darker side can be used

All dimensioning files are available for download from our website



## Drone Targets RSL580-10 and RSL580-20



### Still higher accuracy when using scanners and drones

Combined with the fixed point RSFP-X80, the reference points can first be surveyed exactly with our mini prisms (e.g. RSMP380). The drone markers RSL580 can then be clipped into the same fixed point for the use of drones (see page 72). With adequate quality of the cameras or surveying instruments, accuracies of  $\pm 1$  mm can be achieved.

In combination with the adapter RSA-X80g-1, the RSL580 drone markers can be placed exactly above the surveying point of the mini prism. With the adapter RSA-5/8-1, this combination can be mounted on any current tribrach or tripod with 5/8" UNC thread.

See illustrations below.

**With high-quality cameras, accuracies of  $\pm 1$  mm have already been achieved from an altitude of 35 meters!**



## Drone Targets RSL590M-10\* and RSL590M-20\*



### Highly precise and flexible thanks to the OPFA system


Combined with the fixed point system RSFP-X90, the reference points can first be exactly surveyed with our mini prisms (e.g. RSMP390M\*).


The drone markers RSL590M\* can then be placed on the reference points for the use of drones (see pages 74-77).

Very exact assignment of spatial reference information to a geospatial data set is thereby achieved. Accuracy  $\pm 1$  mm.


For repeat measurements, only a small, barely visible, stainless steel survey mark (RSFP-X90) is left on the object as a reference point (e.g. on bridges or buildings).

**A product from the series "One Point Fits All" – One reference point for all instruments**

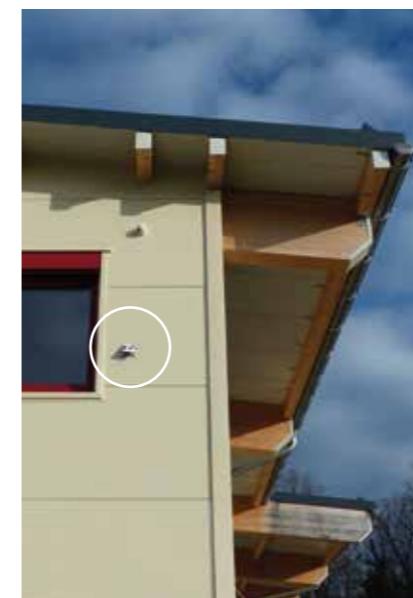

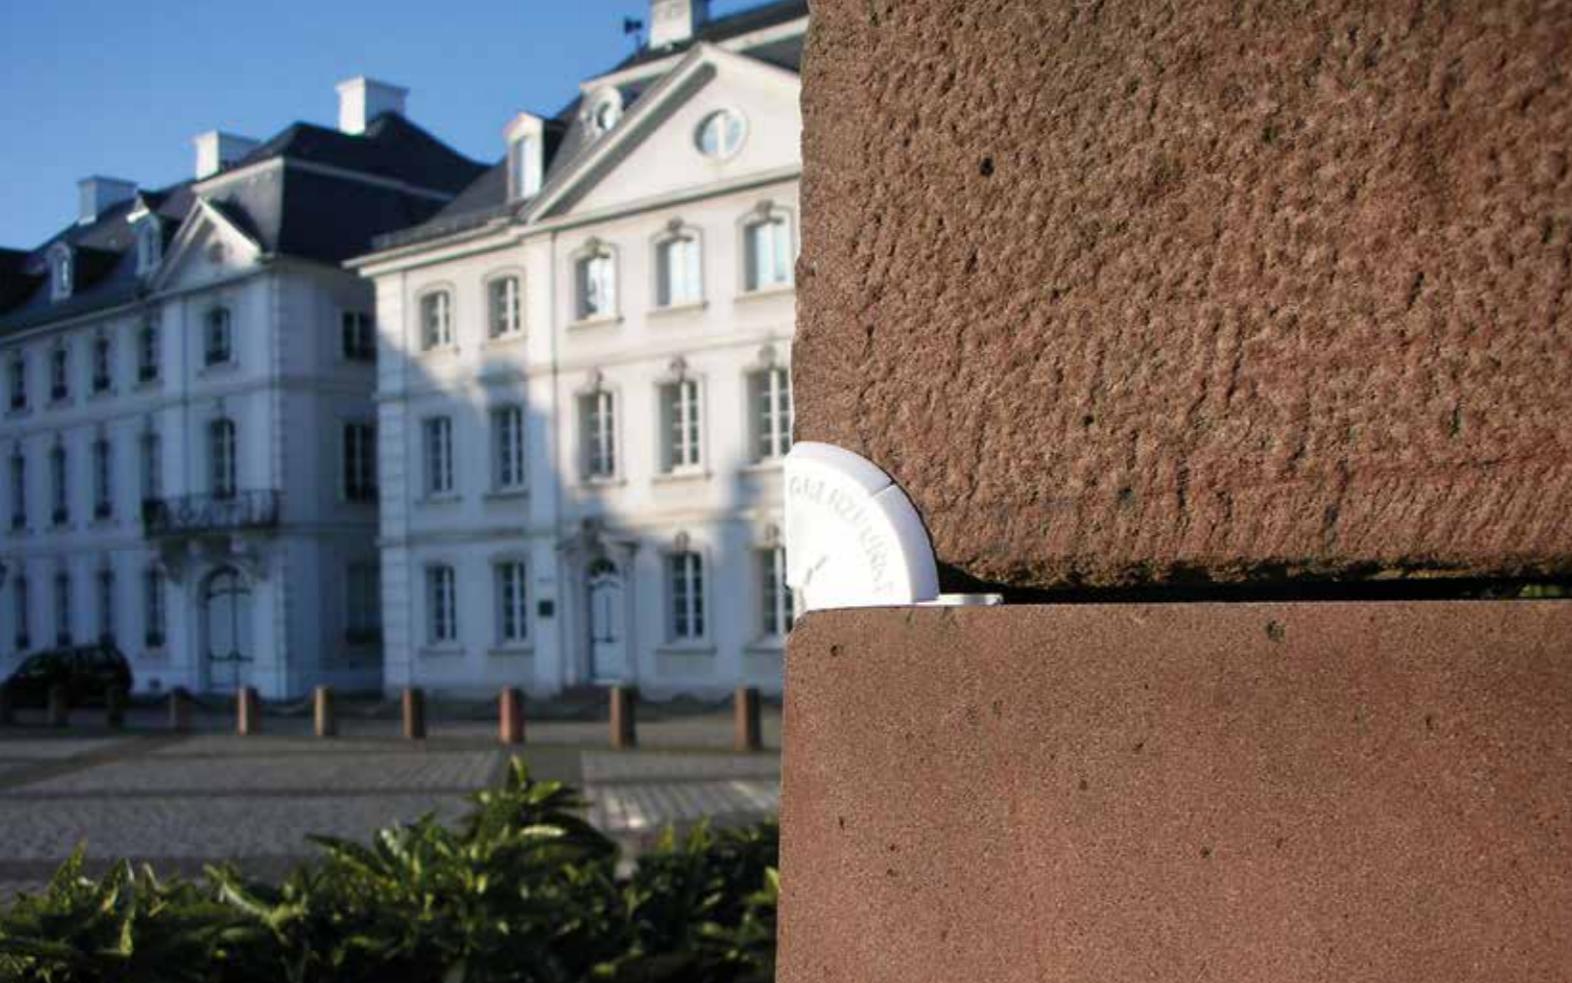

## 4/4 Boundary Markers RSKM10 to RSKM40

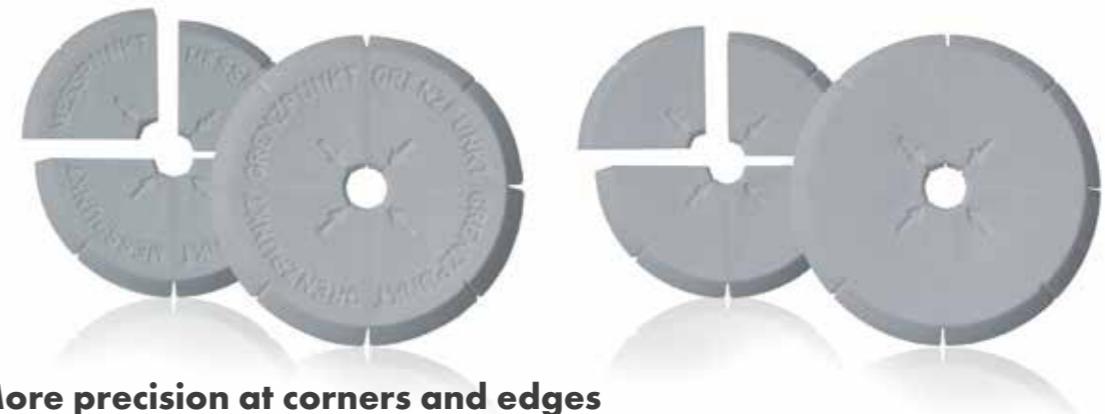

### More precision at corners and edges

The boundary markers are used on solid surfaces as boundary or survey points.


Thanks to an indentation on the back, they can be divided into up to four pieces, allowing for precise documentation of boundary or survey points at interior corners, along walls or masonry, and at exterior corners.

Our RSMK-FIX glue is ideal for affixing markers.

The following products are available:

- RSKM10: 4/4 Boundary Markers without inscription
- RSKM20: 4/4 Boundary Markers with inscription "GRENZPUNKT"
- RSKM30: 4/4 Boundary Markers with inscription "MESSPUNKT"
- RSKM40: 4/4 Boundary Markers with inscription "SURVEY MARK"

**RSKM10 to  
RSKM40**



When used as a fixed point on the ground, this point can be surveyed with a prism so it can be checked quickly and easily if necessary, for example if it is suspected that the fixed point has been moved due to outside interference.

## Fixed Point RSFP1 and Protection Cap RSFP1-A




The aluminum plate RSFP1 is fitted with a 5/8" UNC stainless steel male thread for screwing on a prism or a measuring instrument. If the plate is used as a fixed point on the ground, the surveyor can position his instrument on his tripod precisely above the cross.


The fixed point RSFP1 is supplied with a plastic protection cap for the 5/8" UNC thread. An aluminum protection cap RSFP1-A with 5/8" female thread is also available.



All dimensioning files are available for download from our website

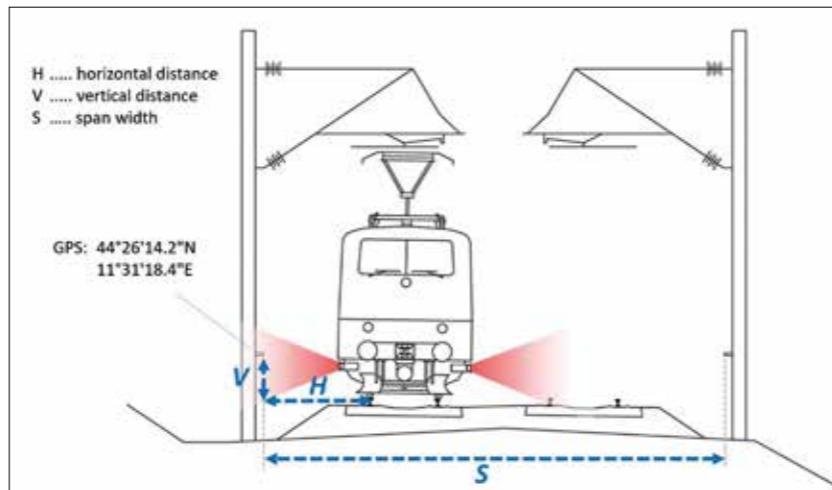

The measurement values of the RPM system

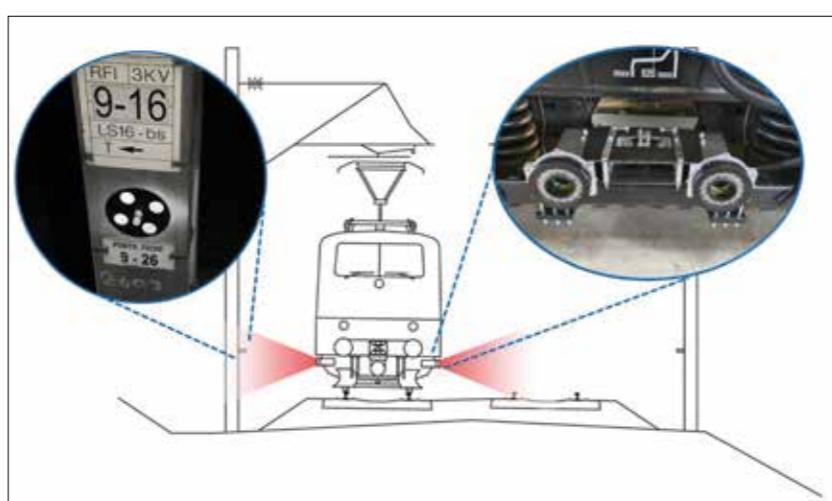

The measuring target mounted on a side post (left) and the RPM stereo-camera system (right)



The RPM system installed on the 08-275 Unimat Combi (RFI Italia) tamping machine

## Track Machine Targets

### TMT10      TMT20, TMT25      TMT30



### Special targets to surveying the absolute track geometry with the RPM stereo camera system

The Reference Point Measurement (RPM) system is a high speed measuring system for track geometry. The resulting track geometry is the fundamental data basis for the tamping machine to maintain perfect track position.

Reference points with known coordinates are used to determine the absolute position of the rail track at speeds up to 100 km/h. A stereo-camera measures the distance between the wheel flange point of the rail and the reference point with a  $\pm 2$  mm accuracy. Combined with the relative track geometry of the inertial measurement system the result is a high precision 3D trajectory in geo-coordinates.

The RPM system uses two stereo-cameras mounted on each side of the vehicle for measuring the distance between the wheel flange point and the reference point. Dedicated flashlights ensure reliable operation at day and night time. The dedicated measuring target is installed on either existing reference points (metallic bolts) or a new reference geometry is established with an initial measuring run.

### Accessory for TMT10 round marker



Starlock disc (11 mm / 12 mm)




Assembly aid for starlock disc

All dimensioning files are available for download from our website



## Laser Target, foldable RSLT10

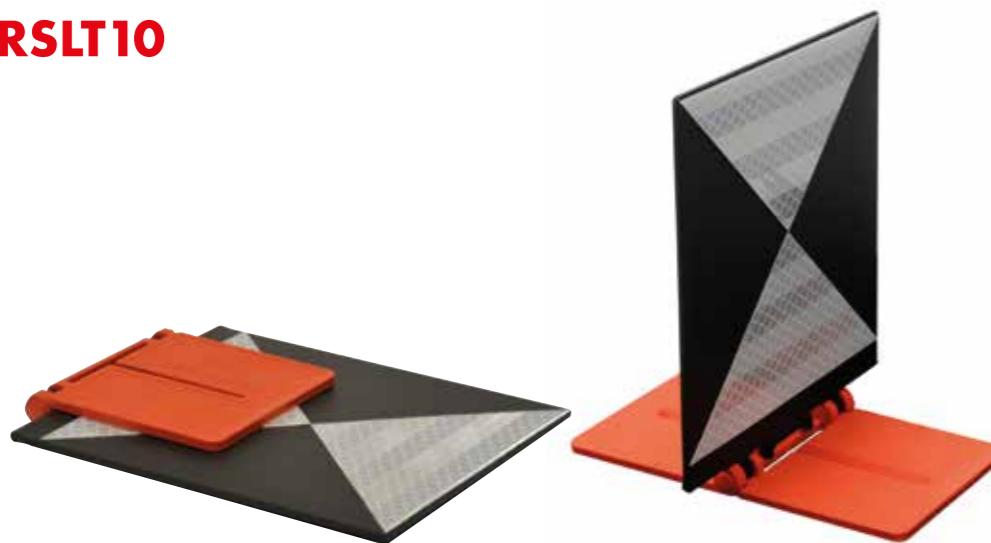

### Aline line laser quickly and accurately

The laser target RSLT10 was developed for the fast and exact alignment of a line laser on axis. The laser target can be folded down and can therefore be stored in the laser box or stowed away in another space saving place.

Place the laser target on the axis on which you want to align the laser. Turn the laser with active axis line in the area of the laser target to left and right until you see the laser line on the laser target and align the laser on the center of the target.

**Please note:** For alignment, your head must be at the same height as and next to or behind the laser. Only then can the reflection of the laser line from the target be clearly seen and, even in bright sunlight, be used at a range of up to 30 m.



## RSA-K480, RSA-K625 and RSA-K515-665 Coupler Adapter



### Fast and precise measurement of couplings and similar components

In bridge building and on large projects, parts of the reinforcement often have to be connected with a coupler joint. To ensure that the reinforcement is placed in exactly the right position, the couplers must be checked for their exact position before concreting work.

On large projects with numerous couplers, this is a very time-consuming task for the surveyor. The measurements become even more complicated if the couplers do not protrude vertically from the floor, but rather laterally or at an angle from the wall.

With our adapters, these measurements can now be carried out quickly and precisely:

- For couplers that need to be measured laterally, two prisms are mounted on the adapters. First, the outer prism (gray in picture below center) is measured, followed by the second prism (red in picture), determining the direction to the coupler head (as in measuring by dual-prism offset). The centre of the coupler head is then determined by the specified height offset from prism two to the coupler head.
- When measuring vertical connections, one prism is sufficient, but in this case, we recommend our 220 degree prism RSMP480 so as not to lose contact with the station when turning the adapter.



## Fixed Point System RSFP-X80, Suction Cup RSSV-X80 and Magnet Pot



**For all instruments  
the same reference point!**

The RSFP-X80 fixed points are ideal for monitoring. Prisms can be attached quickly and easily, for example, to façades and bridges – without the need for drilling.

Magnetic versions are available for steel and marine construction as well as all magnetic surfaces. Creating precise reference points has never been easier.

The system also offers a suitable suction cup for glass and smooth surfaces.



## Products from our system

### One fixed point for all instruments Fixed Point System X80

#### RSFP-X80 fixed point

Suitable for all products from the X80 series: RS183, RSMP380, RSMP480, RSL-X80 and RSL580.

The fixed point can be attached to all standard surfaces using the recommended RSMK-FIX mounting adhesive. Especially popular for track monitoring: Once the work has been completed, the prism can be easily removed from the plate, leaving only the cost-effective RSFP-X80 fixed point behind.



\* Replacement magnets (RSM1030 and RSMS1062) are available as accessories.



#### RSSV-X80 suction cup

Version Ø 75 mm for RS183, RSMP380, RSMP480, RSL-X80 and RSL580

For all glass and smooth surfaces, inside and outside. Its pump function allows the suction cup to be firmly attached to the surface.

Simple and quick installation – with no gluing or drilling required – is so guaranteed.



**Fixed Point System RSFP-X90 to RSFP-X99**  
for all RS products with magnetic base


One reference point for all instruments:

**ROTHBUCHER**  
**ONE POINT**  
FITS ALL SYSTEM



Exceptional solutions make this system  
to a highlight in the survey field

- The fixed point system RSFP-X90 to RSFP-X99 is made of special stainless steel which reacts to magnets
- Magnets in the base plate securely hold various RS products precisely on the same point.
- For repeat surveys, the resumption point RSFP-X90 is much appreciated, as it is almost invisible to passers-by, e.g. on bridges or façades.
- On building sites, the resumption point RSFP-X90 is used as a reference point
- Perfect for BIM, for surveys with scanners Scanner, Lidar or SLAM
- See the following pages for many more application examples
- Depending on the instruments, accuracies of  $\pm 1$  mm are possible

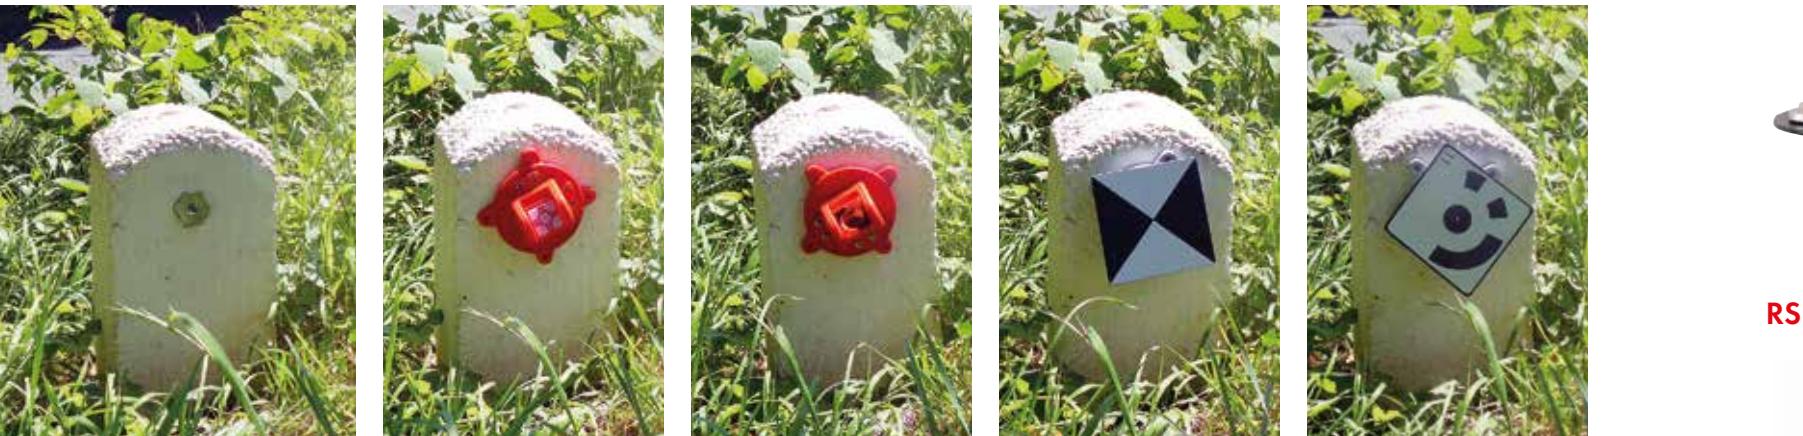

**Fixed Point System RSFP-X90**  
Create fixed points quickly, easily and permanently



Using the correct offset, the surveyor always obtains the same survey point and the same XYZ coordinates.

**Fixed Point System RSFP-X99**  
For challenging surfaces and enhanced magnetic adhesion to the adapter



**Available tilting axis heights:**  
45 mm, 100 mm, 150 mm and 200 mm


Products with tilting axis height 45 mm



Products with tilting axis height 100mm



Products with tilting axis height 150 mm

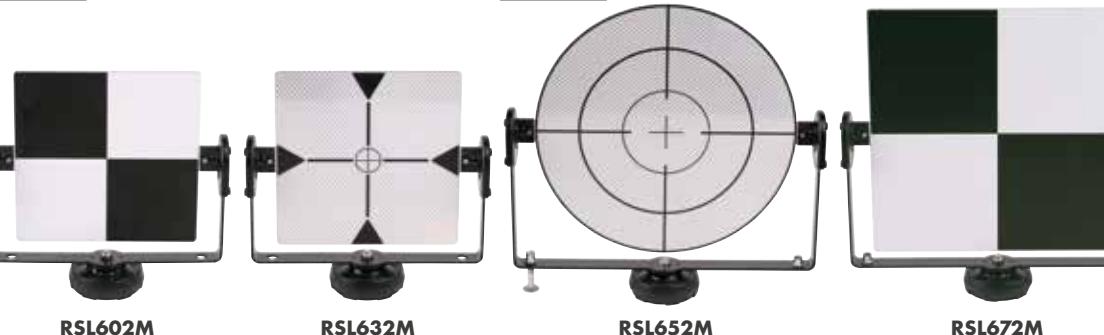

Products with tilting axis height 200 mm





**RSFP-X90 fixed point –  
 the most well-known fixed point from  
 this series – for gluing or screwing**

Fixed Point for all RS products with magnetic base.  
 When using products with the same tilting axis height  
 the reference point always remains exactly the same!



**RSFP-X90-1, RSFP-X90-3 adapter**

RSFP-X90 fixed point as separate version with a 5/8"  
 (RSFP-X90-1) or 3/8" (RSFP-X90-3) female thread, when  
 used with a tripod with 5/8" or 3/8" UNC threaded rod.



**RSFP-X90-2 adapter**

RSFP-X90 fixed point as separate version with a 5/8" male  
 thread, when used with a tripod with 5/8" UNC threaded  
 rod or in combination with the RSA-5/8-1 adapter.



**RSFP-X90-m6, RSFP-X90-m8 adapter**

The fixed point RSFP-X90 is also available as a separate  
 version with a m6 thread (RSFP-X90-m6) and a m8 thread  
 (RSFP-X90-m8).



### RSFP-X90-30 to 39\* adapter

Power socket adapter – smart solution for reference points inside

\* available in different country versions

Digital 3D surveys are standard nowadays, and often one of the challenges is installing reference points in occupied areas so they are not visible.

We have developed these products precisely for this purpose.

In keeping with our "One reference point for all instruments" system, you can now use any socket as a reference point for all instruments. Take a picture of the socket used and you can recreate exactly the same survey point even after a long period of time without leaving a trace.

Suitable for this system and for the 3D survey, our suction cup and floor stand.



### RSFP-X90-5 adapter

In combination with Leica bolts there is the RSFP-X90-5 adapter, enabling all our products with a magnetic base to be easily attached to any Leica bolt.



### RSFP-X99-5 adapter

In combination with Leica bolts there is also the RSFP-X99-5 adapter. If greater magnetic adhesion to the adapter is desired or required, we recommend this version (e. g. in tunnels).

### RSFP-X90-20, RSFP-X90-21 adapter

Fixed point RSFP-X90-20 and RSFP-X90-21 with heavy duty anchor.

For quick and safe mounting of reference points on rocks, difficult surfaces or on historic buildings in the mortar joint.

Lengths 70 mm (RSFP-X90-20), 105 mm (RSFP-X90-21)  
Borehole of Ø 10 mm



### RSFP-X99-20, RSFP-X99-21 adapter

Fixed point RSFP-X99-20 and RSFP-X99-21 with heavy duty anchor.

If stronger magnetic adhesion to the adapter is desired or required, we recommend this version. It is also often preferred for challenging surfaces, such as sprayed concrete.

Lengths 70 mm (RSFP-X99-20), 105 mm (RSFP-X99-21)  
Borehole of Ø 10 mm



### RSFP-X90-25, RSFP-X90-26 adapter

RSFP-X90 fixed point for clamping points or pipes with Ø 22-24 mm (RSFP-X90-25) and Ø 27-29 mm (RSFP-X90-26). Reusable

It has never been easier to create fixed points on construction site.

### RSFP-X99-25, RSFP-X99-26 adapter

RSFP-X99 fixed point for clamping points or pipes with Ø 22-24 mm (RSFP-X99-25) and Ø 27-29 mm (RSFP-X99-26). Reusable

If greater magnetic adhesion to the adapter is desired or required, we recommend this version.

### RSSV-X90 suction cup

Version Ø 120 mm for all RS products with  
magnetic base

For all glass surfaces and smooth surfaces, inside and  
outside.

Its pump function allows the suction cup to be firmly  
attached to the surface. Simple and quick installation –  
with no gluing or drilling required – is so guaranteed.

**The perfect accessory for the 3D survey:** suction cup  
RSSV-X90, power socket adapter RSFP-X90-30 and  
floor stand RSFP-X98-1 and RSFP-X98-2.



### RSSV-X99 suction cup

If greater magnetic adhesion to the adapter is desired or  
required, we recommend this version.



### RSFP-X97-2/-3 ground marker spike

RSFP-X97-2: Aluminium ground marker spike, 270 mm long

RSFP-X97-3: Steel ground marker spike, 470 mm long

These ground targets are always driven into the ground  
when there is no means of creating a reference point on  
objects. This means that permanent reference points can  
be created even on open grassland, sandy soils and other  
suitable surfaces and used with a wide variety of instruments.

#### Examples of use:

- 1) Fix the ground marker spike in the soil.
- 2) Screw the GNSS antenna onto the RS0195M adapter  
and place it on the ground marker.
- 3) After a short time, the reference points can be used with  
total stations, scanners, Lidar, or drones.

For use with an GNSS antenna pole, we offer the fixed  
points RS090M and RS0190M.



### RSFP-X97-1+2 floor stands

The **RSFP-X98-1 floor stand** is frequently used for quickly  
relocating total stations or scanners. Another practical appli-  
cation is use as a temporary solution for reference points –  
simply unfold, set up, attach the target or prism and you're  
done!

A space-saving and versatile accessory that achieves  
an accuracy of around 1.0 mm to 1.5 mm when handled  
carefully!



The **RSFP-X98-2 floor stand** offers additional  
application options:

- Can be placed exactly over an existing reference point
- Can be precisely aligned using a spirit level and screws
- Also suitable for staking
- Can optionally be supplied with a 5/8" connector and  
is therefore also suitable for GNSS and GPS antennas  
and other accessories with this connector.

A space-saving and versatile accessory that even exceeds  
the accuracy of the RSFP-X98-1 floor stand when handled  
carefully.



### RSFP-X99 fixed point

For quick fixing on difficult substrates using adhesive, there is the RSFP-X99 support plate. In addition, the stainless steel support plate for magnets provides significantly more adhesion for all our products with a corresponding base plate.

As a long-term solution for monitoring on steel structures, these parts can also be welded on.



### RSFP-X99M fixed point

The RSFP-X99M fixed point is the quickest and easiest way to create a reference point on any magnetic surface. With this version, there is no need to glue, clean or dry the surface to create a reference point. The fixed point is simply placed in the desired location – and is ready to use!

As part of the OPFA system, the fixed point can be used with all standard measuring instruments. Thanks to the strong magnetic force, this version is also ideal for monitoring steel structures.



### RSFP-X99-1 fixed point

For tripod or tribrach

The RSFP-X99-1 fixed point has two large plates made of stainless steel suitable for magnets and a 5/8" internal thread, which means it can be mounted on all tripods or tribrachs.

Thanks to the enhanced magnetic force, even large scanner targets can be used outdoors. Even at higher wind speeds, the target remains reliably attached to the fixed point.



### RSFP-X99-11+12 fixed point

On construction sites and in tunnels where anchor sleeves with DW15 threads are commonly used, the RSFP-X99-11 adapter allows the use of existing anchor sleeves as permanent reference points for surveying and monitoring.

Without the need for drilling, this solution enables the creation of reference points for total stations, scanners, drones, SLAM, or mobile mapping that are unparalleled in durability. Even if the adapter is damaged, the anchor sleeve remains securely embedded in the concrete, ensuring that the original survey point can always be restored.

For long-term reference points on very difficult surfaces, we recommend the RSFP-X99-12 fixed point with a rod length of 160 mm.



### RSFP-X99-70 fixed point for tension belt

The RSFP-X99-70 fixed point can be used with all types of tension belts up to 32 mm.

The RSFP-X99-70 is supplied without a tension belt.

#### Applications:

- On columns where drilling is not desirable
- On trees, ideally close to the roots
- On historic columns where drilling is generally not desirable



### RSFP-X99-73 fixed point

For quick and precise reference points on pipes and scaffolding with Ø 48-51 mm. With the RSFP-X99 fixed point, prisms and all scanner, Lidar, SLAM and drone targets can be attached quickly. The large plate provides stability, even for larger targets.

Particularly useful for scaffolding that prevents scan transition from inside to outside: Reference points on the scaffolding provide a simple and precise link. Also suitable for railings with the right diameter.



### Adapter-Set RSFP-X90-S40

The adapters can be easily attached to one of the magnetic bases (e.g. RSMP390M). The parts are automatically positioned correctly by the RSFP-X90 reference point (flower) and held by the magnets on the base plate.

Depending on the attachment, the user has now the following possibilities:


- Control measurements of inside and outside corners
- Control measurements at recesses or at the edge of the ceiling
- Measurements on pillars – direct measurements can be taken on bevelled edges at the vertex!
- Transfer heights around the corner with marking attachment
- Measure of position and heights of corner blocks quickly and precisely when bonding clay blocks



### RSPC90M cover

The RSPC90M protection cap protects the RSFP-X90 series reference points from soiling and weather effects such as ice and snow. Thanks to the magnetic lid, the protection cap can be removed from or placed on the reference point with a flick of the wrist.

For using reference points on the ground, the protection caps have a cross printed on them, so surveyors can easily position themselves over a reference point.

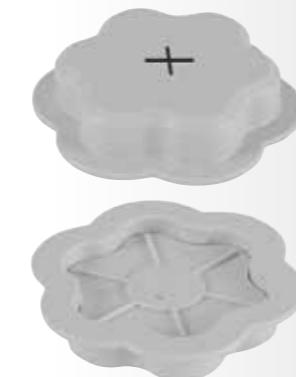

When using the RSFP-X90 reference points on walls and façades, the cross on the protection cap is used as reference points for SLAM and Lidar. Caution: you need to plan for an offset here!

## Accessories

### Adapters RSA-X80g-1 and RSA-X80g-2

A plug system is built into the base plate of many of our products as standard, enabling a wide variety of connections between the products.

The RSA-X80g-1 angled adapter and the RSA-X80g-2 adapter enable other combinations that are very helpful for surveying, such as:

- RS mini prisms stacked on top of each other for measurements from bottom to top, e.g. from level 0 to level XY
- RS mini prisms with RS scanner targets
- RS mini prisms with RS ground control targets
- RS mini prisms with RS SLAM targets
- RS mini prisms with RS mobile mapping targets




### The RS surveying accessory system:

High precision with countless options.

### Adapter with 5/8" thread RSA-5/8-1

With the adapter RSA-5/8-1, many further combinations can also be easily mounted on a tribrach.

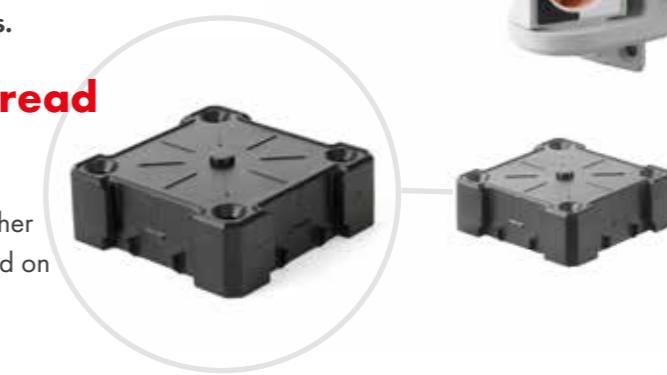

See figure below right.

When mounting the scanner targets RSL420M and RSL422M over a prism, the adapter RSA-5/8-1 is additionally used as a connecting piece.



### In Combination

Thanks to our extensive RS surveying accessory system, different surveying instruments can use the same reference point or measurements can be made using various surveying instruments with exactly the same survey point.

The illustration on the right shows one of the various combinations that are possible thanks to the clever plug-in system and the ever growing range of accessories available at Rothbacher Systems.



## Accessories



### Protection Cap RSPC20 and RSPC20M\*

These protection caps protect prisms and reflective targets from the weather and soiling. For points that are hard to reach, on a tunnel roof, for example, we offer the magnetic version.

The metal cube RSPC50 can be screwed onto a prism pole with 5/8" thread (see illustration below). This enables the protection cap to be removed from and fitted over the prism at a height of 3 - 4 meters.

RSPC20/RSPC20M\* for RS183, RSMP280, RSMP380, RSMP480



\*magnetic

### Metal Cube RSPC50 with 5/8" Female Thread

With its 5/8" thread, the metal cube RSPC50 can be screwed onto a prism pole.

The magnetic protection cap RSPC20M\* can thereby be easily fitted over and removed from the plastic case of the prisms, even from difficult positions, and refitted at any time.



## Construction Glue with high grip RSMK-FIX

- High-performance mounting adhesive with instant initial adhesion
- Isocyanate- and silicone-free
- Permanently elastic and suitable for a wide range of uses
- Odourless
- RSMK-FIX is suitable for all products from Rothbucher Systems
- Can be used in any current pistol applicator
- A good applicator is recommended



## Suitcase Sets with Reflective Targets

**Ideal for construction surveying, staking out and measuring**



Fig. KS1-193M+  
Metrics: W 390 mm x H 310 mm x D 200 mm  
Weight: 6.3 kg

Compactly and safely packaged, practical and quickly to hand – our suitcase sets, the ideal companion: Everywhere.

### Suitcase KS1-193M+ with:

- 4 Reflective Targets RS192M or RS193M
- 1 Stake Out Aid RS96

#### Accessories

- 2 Suction Cups RSSV-X90
- 2 Adapters RSFP-X90-1
- 2 Adapters RSFP-X90-2
- 30 Fixed Points RSFP-X90
- 4 Fixed Points RSFP-X90-20
- 2 Fixed Points RSFP-X90-21
- 2 Fixed Points RSFP-X90-25
- 2 Fixed Points RSFP-X90-26
- 4 Fixed Points RSFP-X99-11



Reflective Target  
RS193rM



RS96

### Suitcase KS1-193M+2:

Contents like KS1-193M+ with additional trays for further surveying accessories.

Options as shown in the following illustration:

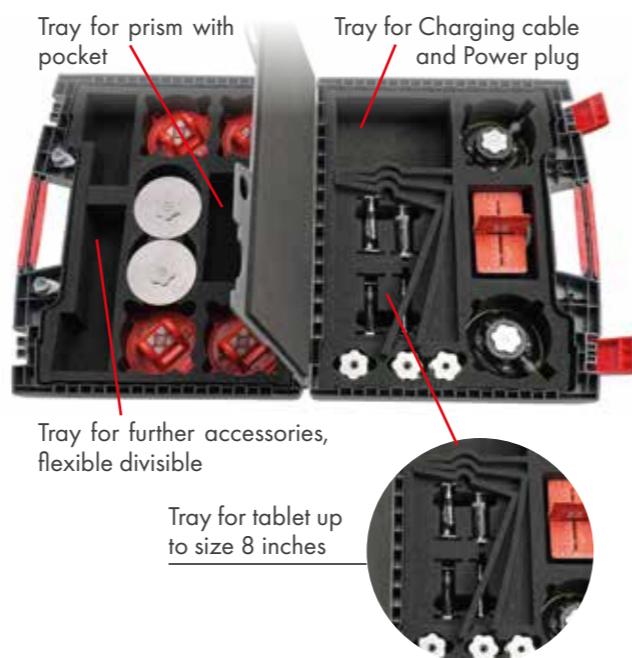


Fig. KS1-193M+2  
Metrics: W 500 mm x H 420 mm x D 225 mm  
Weight (without tablet an additional accessories): 7.8 kg

## Suitcase Sets with Prisms

**Ideal for construction surveying, staking out and measurements with robotic total stations**



Fig. KS1-390M+  
Metrics: W 390 mm x H 310 mm x D 200 mm  
Weight: 6.3 kg

Our suitcase sets are also available with additional compartments for more room to store additional accessories – see illustration.

### Suitcase KS1-390M+C/S with:

- 4 Mini Prisms RSMP390M
- **optional** 1 Stake Out Aid for Robotic Total Stations RS150M

#### Accessories

- 2 Suction Cups RSSV-X90
- 2 Adapters RSFP-X90-1
- 2 Adapters RSFP-X90-2
- 30 Fixed Points RSFP-X90
- 4 Fixed Points RSFP-X90-20
- 2 Fixed Points RSFP-X90-21
- 2 Fixed Points RSFP-X90-25
- 2 Fixed Points RSFP-X90-26
- 4 Fixed Points RSFP-X99-11



Mini Prism  
RSMP390rM-S



RS150M

### Suitcase KS1-390M+C/S-2:

Contents like KS1-390M+ with additional trays for further surveying accessories.

Options as shown in the following illustration:

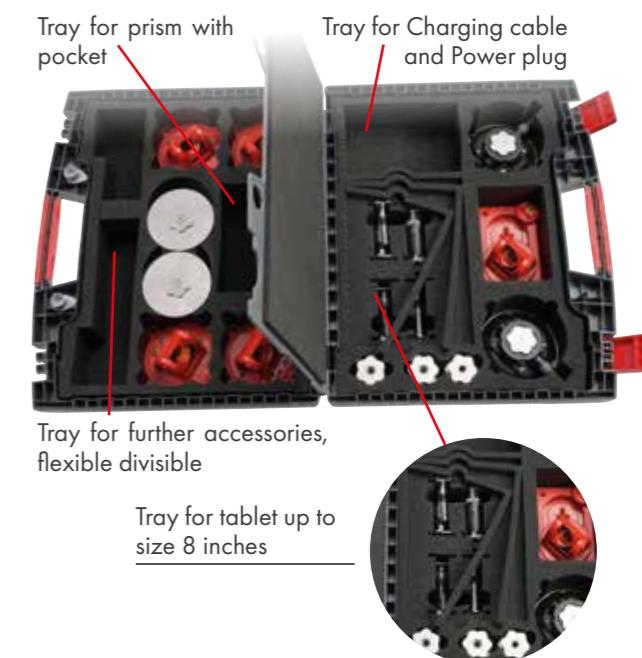


Fig. KS1-390M+C/S-2  
Metrics: W 500 mm x H 420 mm x D 225 mm  
Weight (without tablet an additional accessories): 7.8 kg

## Suitcase Sets with Laser Scanner- or SLAM Targets

**Ideal for 3D inside and outside measurements**



Fig. (left) KS2 available for RSL420M, RSL422M, RSL452M, RSL453M

Metrics: W 390 mm x H 310 mm x D 200 mm

Weight: 4.5 kg

Fig. (right) KS2-2 available for RSL420M, RSL422M, RSL452M, RSL453M

Metrics: W 500 mm x H 420 mm x D 225 mm

Weight: 9 kg

**Suitcase sets with laser scanner- or SLAM targets – perfectly coordinated equipment packaged to save space.**

### Suitcase KS2-422M or KS2-422M-2 with:

- 6 Laser Scanner Targets RSL420M or RSL422M
- 1 Mini Prism RSMP395M

#### Accessories

- 30 Fixed Points RSFP-X90
- 4 Fixed Points for power sockets RSFP-X90-30\*\*

### Suitcase KS2-452M or KS2-453M with:

- 6 Laser Scanner- and SLAM Targets RSL452M or RSL453M
- 1 Mini Prism RSMP395M

#### Accessories

- 30 Fixed Points RSFP-X90
- 4 Fixed Points for power sockets RSFP-X90-30\*\*



RSL420M/RSL422M



RSL452M/RSL453M

### Suitcase KS2-420M or KS2-422M-2 with:

- 4 Laser Scanner Targets RSL420M or RSL422M
- 1 Mini Prism RSMP395M

#### Accessories

- 50 Fixed Points RSFP-X90
- 4 Fixed Points for power sockets RSFP-X90-30\*\*
- 2 Suction Cups RSSV-X90
- 3 Floor Stands RSFP-X98-1

### Suitcase KS2-452M-2 or KS2-453M-2 with:

- 4 Laser Scanner- and SLAM Targets RSL452M or RSL453M
- 1 Mini Prism RSMP395M

#### Accessories

- 50 Fixed Points RSFP-X90
- 4 Fixed Points for power sockets RSFP-X90-30\*\*
- 2 Suction Cups RSSV-X90
- 3 Floor Stands RSFP-X98-1

## Laser Scanner Sphere Suitcase Set

**Ideal for 3D inside and outside measurements**



Fig. KS3-LB10M

Metrics: W 500 mm x H 420 mm x D 240 mm

Weight: 7.5 kg



### Suitcase KS3-LB10M with:

- 6 Laser Scanner Spheres RSLB10M magnetic

## Laser Scanner / SLAM Targets Suitcase Set

**Safe and ready to hand - perfectly organised for precise 3D measurements and the use of drones**



Fig. KS4-602M/632M

Metrics: W 495 mm x H 315 mm x D 365 mm

Weight: 11 kg



RSL602M



RSL632M




### Suitcase KS4-602M/632M with:

- 4 Laser scanner- and drone targets RSL602M or
- 4 Laser scanner- and SLAM targets RSL632M


#### Accessories:

- 30 Fixed Points RSFP-X90
- 4 Adapters RSFP-X90-1
- 4 Floor Stands RSFP-X98-1

\*\* Different country versions  
use prisms with copper coating for Leica and Geomax instruments,  
Prisms with silver coating for Trimble, Topcon, Sokkia, Hilti, etc.

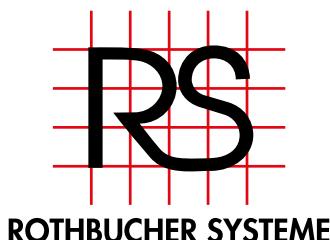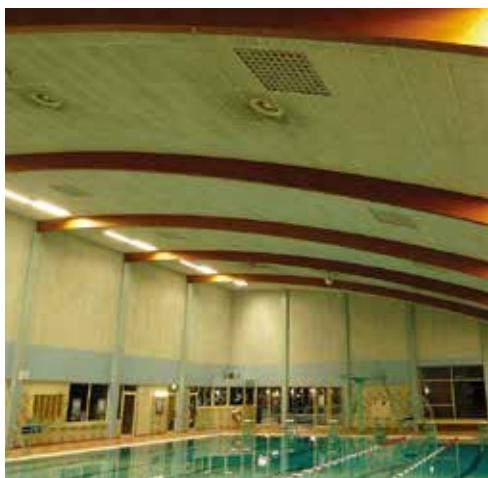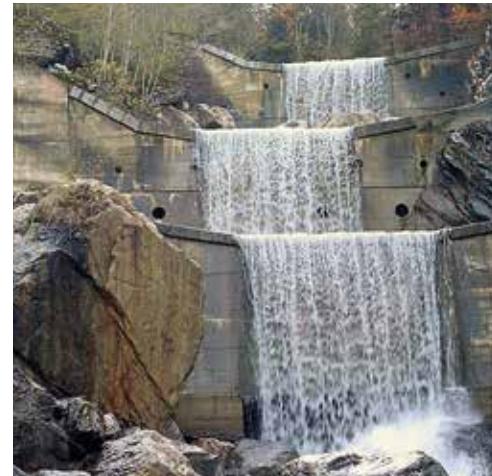

ROTHBUCHER SYSTEME

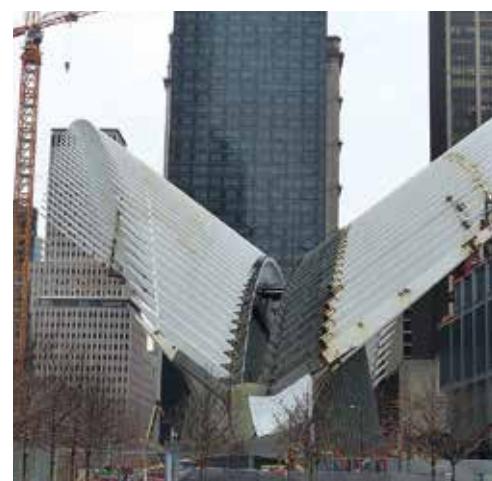

## The RS Surveying Accessory System Proven millionfold – in use worldwide

**Request our price list**

Rothbacher Systeme  
Reichenhaller Str. 109A  
D-83435 Bad Reichenhall  
[www.smart-targets.com](http://www.smart-targets.com)

Phone +49 (0) 8651 2749  
Fax +49 (0) 8651 3090  
Cell +49 (0) 171 7314961  
[info@smart-targets.com](mailto:info@smart-targets.com)

